

Farbe 30S

染色樣板機



專利號 Patent No.:
ZL 2020 2 2e234562.6
ZL 2020 2 2235360.3



- 適用於各種棉質面料的成衣染色
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作，可記憶20組程式，每組20個步驟
- 專利撥水式內膽，無泵水循環，實現超低水比染色，節約用水及染料
- 染色水比1：5以下
- 獨特間接加熱方式，升溫速度快，最高升溫可達95℃；外膽殼加熱方式，不佔用儲水空間，可有效減少水比
- 採用電控氣動入冷/熱水系統，配合流量計控制，使內膽水比控制更準確且操作方便
- 採用變頻調速控制內膽轉速，滿足不同染色需求
- 配有手動加藥系統
- SUS 316不鏽鋼內膽，可滿足不同染色及洗滌需求
- 具有自動脫水功能，極大地節省人力並顯著地提高生產效率
- Suitable for the dyeing of garment of various cotton fabrics
- Adopt PLC and user friendly touch screen for operation; can memorize 20 programs, each with 20 steps
- Patented bail type inner drum and pump-free water circulation enable extra low liquor ratio, thus reduced water and dye consumption
- Dyeing liquor ratio less than 1:5
- Unique indirect heating provides quick temperature rise, maximum temperature 95℃; shell heating that occupies no water storage room can effectively reduce liquor ratio
- Electric controlled pneumatic cold/hot water feeding system with the aid of flowmeter enables accurate liquor ratio
- Inverter controlled inner drum speed variation can meet different dyeing requirements
- With manual chemical feeding system
- SUS316 inner drum and chemical tank can satisfy different requirements in dyeing and washing process
- With automatic extracting function, saved labor and high efficiency



氣動入水/入蒸汽
Pneumatic water/steam feeding



手動入藥水缸
Manual chemical feeding tank




入水流量計
Water inlet flowmeter




變頻調速控制內膽轉速
Inverter controlled inner drum speed




撥水效果
Water splashing effect

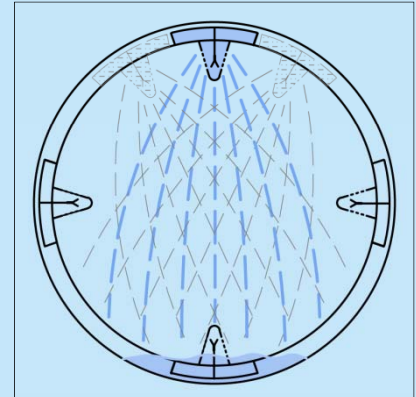


專利撥水式內膽
Patented bail type inner drum

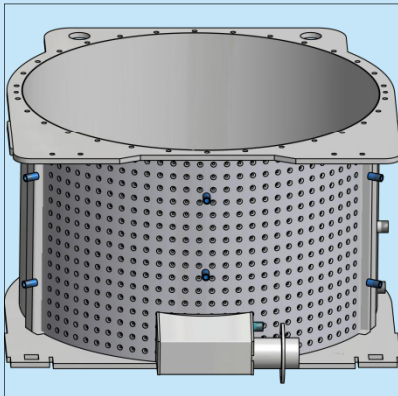

外殼間接保溫系統
Shell indirect heat preservation system

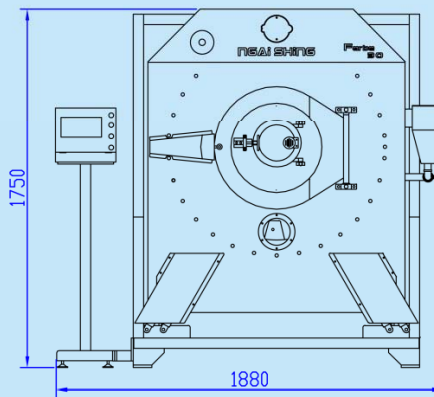

機身尺寸簡圖(單位：mm)
Machine size diagram(unit: mm)

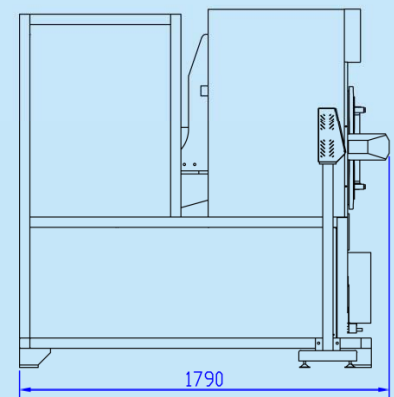

型號 Model	容量(kg) Capacity	內膽容積(m³) Inner Drum Volume	電源 Power Supply	總功率(kW) Total Power	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	洗水轉速 (RPM) Washing Speed	脫水轉速 (RPM) Extracting Speed	機身尺寸 (mm) Machine Size
Farbe 30S	5~10	0.32	3PH/380V/50Hz	3	Ø900×496×2	Ø1012×640×2	10~37	700	1880×1790×1750



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下

G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078
Fax: (852) 2785 3149

E-MAIL: info@ngaishing.com
Http://www.ngaishing.com