

NS-2700A-500 / NS-2700A-650

工業洗衣機

Industrial Washing Machine



NS-2700A-500

- 適用於洗滌各種棉織、牛仔、梭織、針織、化纖等衣物織品
- 內膽門鎖及合頁採用隱藏式設計，內外膽間距只有38mm，可極大減少用水量
- 採用三級皮帶傳動，增大傳動比，減輕馬達工作負荷
- 內膽可定時正、逆轉動
- 配備氣動剎車系統，方便停機時對門的位置
- 自動洗衣時間及到溫計時與即時計時方式選擇
- 配備數控恆溫掣，溫控精確
- 採用蒸汽直接加溫


選購件

蒸汽氣動閥總成
手控氣動入水系統
手動改氣動排水控制系統
另增手動排水控制系統
另增氣動排水控制系統
手動入藥水盒系統
速度控制器系統



- Suitable for washing of garment and textile of various fabrics such as cotton, denim, woven, knitted and synthetic fabrics, etc.
- Door lock and hinges are hidden up to reduce the spacing between inner and outer drums to only 38mm, hence water consumption saved greatly
- 3-stage belt drive to increase transmission ratio and reduce working load of motor
- Inner drum can rotate forward and backward according to preset time
- Pneumatic braking system for convenient door position alignment when stopping
- Automatic washing time control, up-to-temperature and immediate timing modes available for selection
- Digital thermostat provides accurate temperature control
- Direct steam heating

Options


Steam Pneumatic Valve Assy
Manual Controlled Pneumatic Water Feeding System
Manual to Pneumatic Water Draining Control System
Additional Manual Water Draining Control System
Additional Pneumatic Water Draining Control System
Manual Chemical Feeding System
Speed Control System

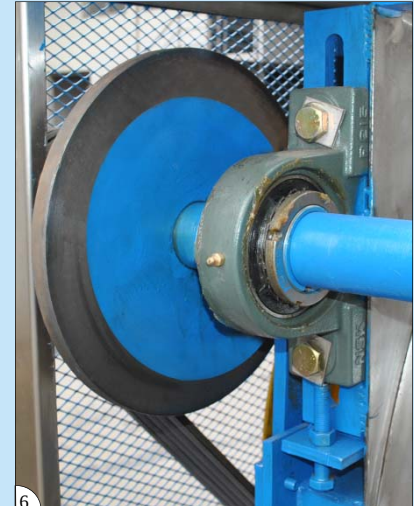

序號 No.	說明 Description
1	直接加溫裝置 Direct steam heating system
2	SUS 304不鏽鋼內膽 SUS 304 stainless steel inner drum
3	控制電箱 Electric box
4	三級皮帶傳動 3-axis pulley belt drive
5	手動排水系統 Manual water draining system
6	氣動碟剎裝置 Pneumatic disc brake device
7	內膽隱藏門鎖及合頁 Hidden door lock & hinges

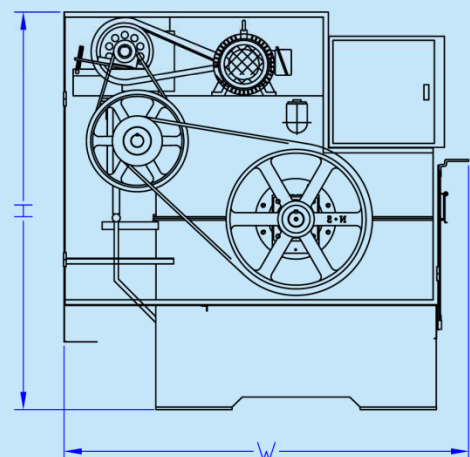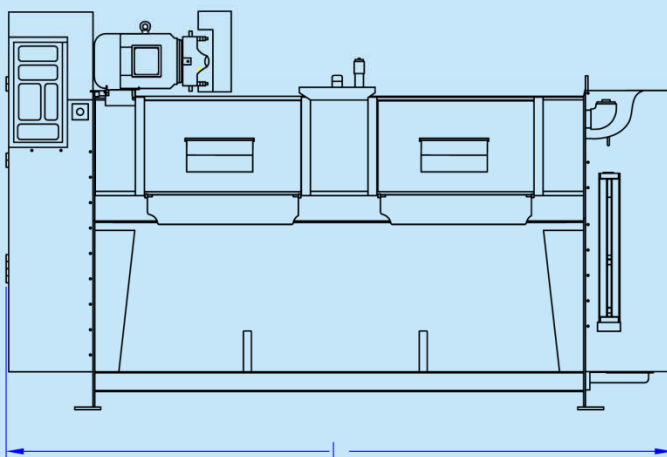

機器外形圖
Machine Size:(mm)

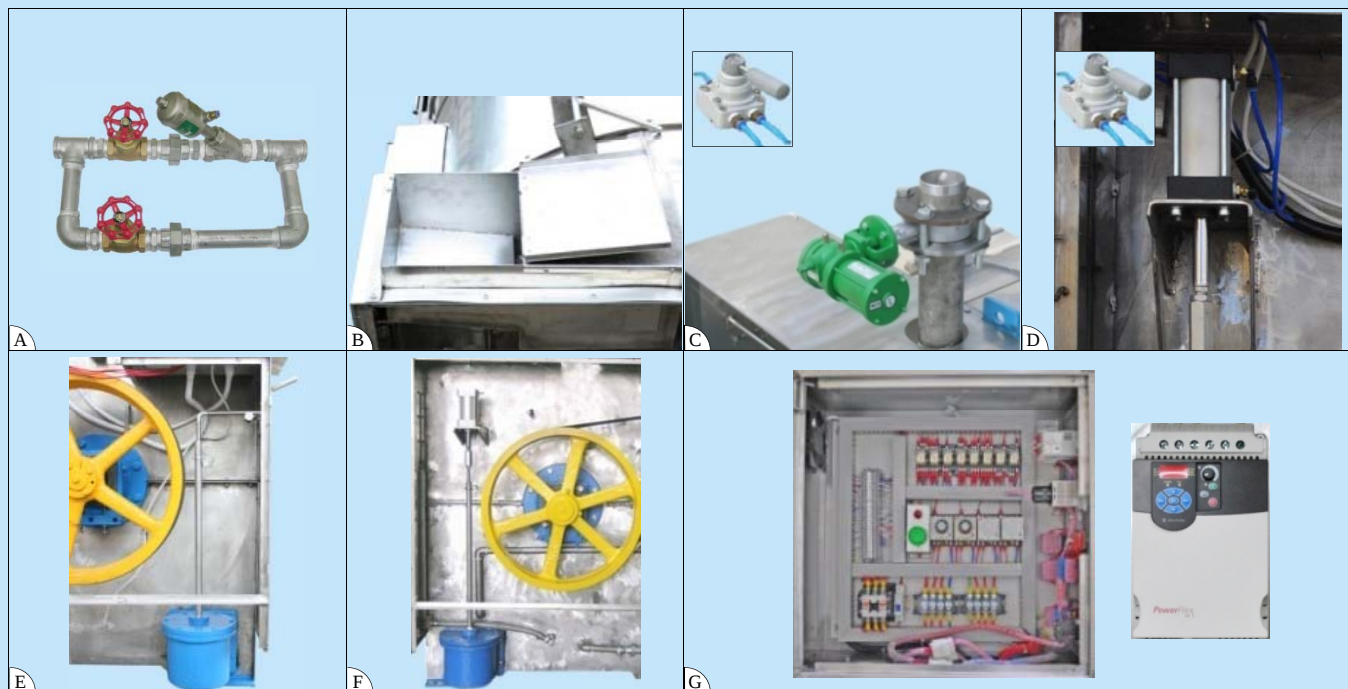

選購件(Options):

序號 Serial No.	編號 Part No.	中英文名稱 Description	適用於 Suitable for
A	O-I-01-4	蒸汽氣動閥總成-Ø1" Steam Pneumatic Valve Assy-Ø1"	NS-2700A-500 / NS-2700A-650
B	O-I-53-02	手動入藥水盒系統 Manual Chemical Feeding System	NS-2700A-500 / NS-2700A-650
C	O-I-04-3	手控氣動入水系統-Ø3" Manual Controlled Pneumatic Water Feeding System-Ø3"	NS-2700A-500 / NS-2700A-650
D	O-I-07-3	手動改氣動排水控制系統-Ø8" Manual to Pneumatic Water Draining Control System-Ø8"	NS-2700A-500 / NS-2700A-650
E	O-I-08-1	另增手動排水控制系統-Ø8" Additional Manual Water Draining Control System-Ø8"	NS-2700A-500 / NS-2700A-650
F	O-I-09-1	另增氣動排水控制系統-Ø8" Additional Pneumatic Water Draining Control System-Ø8"	NS-2700A-500 / NS-2700A-650
G	O-I-10-5	速度控制器系統11kW Speed Control System 11kW	NS-2700A-500 / NS-2700A-650

型號 Model	容量(LBS) Capacity	電源 Power Supply	馬達 (kW) Motor	耗蒸汽量(kg/hr) Steam Consumption	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	入水口Water Inlet(inch)	出水口Water Outlet(inch)	洗衣速度 (RPM) Washing Speed	機身尺寸(mm) Machine Size
NS-2700A-500	500	3PH/380V/50Hz	11	160*	Ø1220x2260x4	Ø1296x2440x2	Ø3"x2	Ø8"	30~33	3270x1860x2000*
NS-2700A-650	650		11	199*	Ø1370x2260x4	Ø1446x2440x2	Ø3"x2	Ø8"	30~33	3270x1990x2070*



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com