

NS-2261P-450 / 500 / 650

工業自動洗衣機

Automatic Industrial Washing Machine



NS-2261P-450




- 適用於各種梭織、針織、牛仔衣物的普洗、酵洗、套色
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作，可記憶20組洗衣程式，每組程式可設置30個步驟
- 採用三級皮帶傳動，增加轉動扭矩
- 採用自動洗衣時間及到溫計時與即時計時方式選擇
- 採用直接加溫與間接加溫相結合
- 採用智能溫度模塊配合觸摸屏控制，溫度控制更精確
- 採用水位自動控制和氣動開關門裝置
- 採用氣動剎車裝置，停機後內門對外門自動控制
- 採用無段變速的變頻器，速度可調(8~36RPM)
- 備2個氣動入水和1個氣動排水以及氣動入蒸汽
- 內外膽採用SUS 304不鏽鋼，內膽孔徑Ø8mm
- Suitable for garment wash, enzyme wash and tinting of garments made of various kinds of fabrics such as woven, knitted & denim
- Adopt PLC and user friendly touch screen for operation; it can memorize 20 groups of programs, up to 30 steps per program
- 3-stage belt drive to increase torque
- Options of automatic washing timing, up-to-temperature timing and immediate timing
- Combination of directing heating and indirect heating
- Intelligent temperature module in conjunction with touch screen provides accurate temperature control
- Adopting automatic water level control and pneumatic door opening and closing device
- Pneumatic braking device, inner door could align with outer door automatically after machine shutdown
- Inverter for stepless speed control with speed range:8-36RPM
- 2 pneumatic water inlet systems and 1 pneumatic water drainage and steam intake systems
- SUS 304 Stainless steel inner & outer drums, inner drum bore size Ø8mm

選購件：

- NS-2291 藥水配量缸
- O-I-09-2 另增氣動排水控制系統(程控)-Ø8"
- O-I-70-02 入水流量計系統-Ø2"(NS-2261P-450)
- O-I-70-03 入水流量計系統-Ø3"(NS-2261P-500/650)

Optional Accessories :


- NS-2291 Chemical dosing tank
- O-I-09-2 Additional pneumatic water draining control system(program control)-Ø8"
- O-I-70-02 Water inlet flow meter system-Ø2"(NS-2261P-450)
- O-I-70-03 Water inlet flow meter system-Ø3"(NS-2261P-500/650)

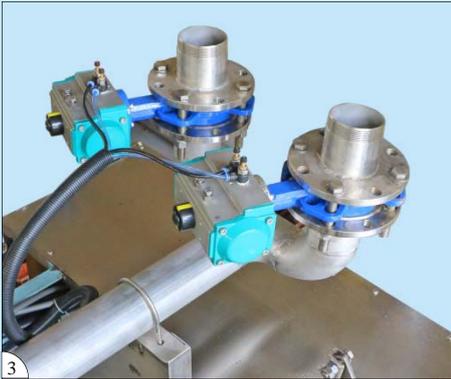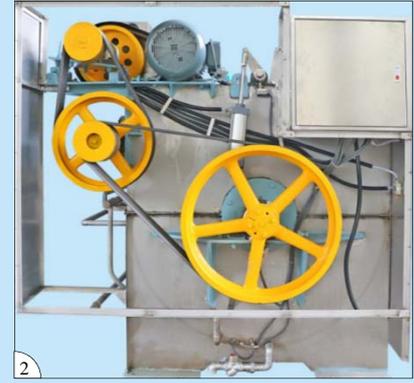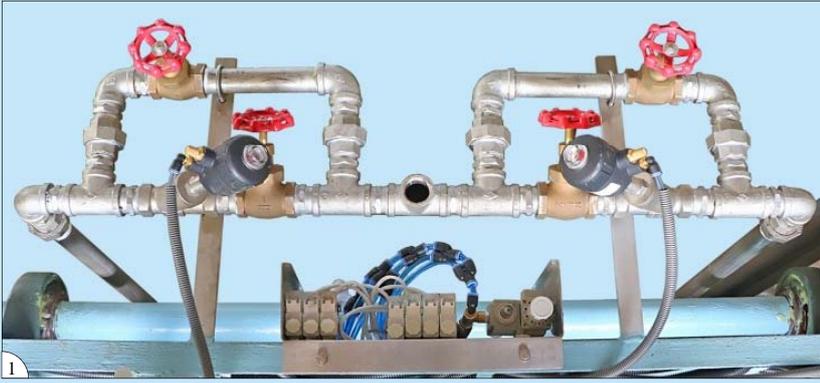

1. 蒸汽(直接/間接加溫)氣動閥總成
2. 三級皮帶傳動
3. 電控氣動入水系統
4. 速度控制器系統

1. Steam (Direct/Indirect Heating) Pneumatic Valve Assy
2. Three-stage belt drive
3. Electric Controlled Pneumatic Water Inlet System
4. Speed Control System

選購件：
Optional Accessories :

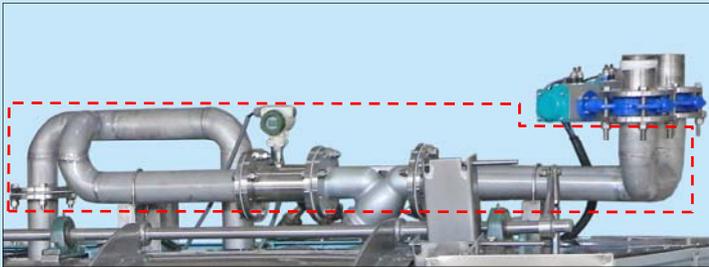

O-I-70-02/ O-I-70-03
入水流量計系統
Water inlet flow meter system



O-I-09-2 另增氣動排水控制系統(程控)-Ø8"
Additional Pneumatic Water Draining Control System(program control)-Ø8"



NS-2291
藥水配量缸
Chemical Dosing Tank

型號 Model	容量 (LBS) Capacity	電源 Power Supply	馬達(kW) Motor	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	耗蒸汽量 (kg/hr) Steam consumption	入水口 (inch) Water Inlet	出水口 (inch) Water Outlet	水容量(L) Water Capacity	洗衣速度 (RPM) Washing Speed	機器尺寸(mm) Machine Size
NS-2261P-450	450	3PH/380V/50Hz	7.5	Ø1100x2260x3	Ø1250x2440x2	170	Ø2"x2pcs.	Ø8"x1pc	1573	8~36	3300x1800x2000
NS-2261P-500	500		11	Ø1220x2260x4	Ø1370x2440x2	200	Ø3"x2 pcs.		1882		3300x1900x2080
NS-2261P-650	650		11	Ø1370x2260 x4	Ø1500x2440x2	260			2277		3300x2110x2150



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com