

NS-2700-450 / 500 / 650

NS-2701-450 / 500 / 650

工業洗衣機 Industrial Washing Machine




NS-2700-500


- 適用於各種梭織、針織、牛仔衣物的普洗、酵洗、套色
 - 採用三級皮帶傳動，增加轉動扭矩
 - 內膽可定時正、逆轉動
 - 配備氣動剎車系統，方便停機時對門的位置
 - 自動洗衣時間及到溫計時與即時計時方式選擇
 - 配備數字式溫度控制器控制，溫度控制更精確
 - 內外膽採用SUS 304不鏽鋼，內膽孔徑Ø8mm
 - **NS-2700**系列採用蒸汽直接加溫
 - **NS-2701**系列採用蒸汽直接加溫與間接加溫相結合
- 選購件：**
- 蒸汽(直接/間接加溫)氣動閥總成(NS-2701系列)
 - 蒸汽氣動閥總成(NS-2700系列)
 - 疏水閥總成(NS-2701系列)
 - 手控氣動入水系統
 - 手動改氣動排水控制系統
 - 另增手動排水控制系統
 - 另增氣動排水控制系統
 - 手動入藥水盒系統
 - 速度控制器系統
- Suitable for garment wash, enzyme wash and tinting of garments of various fabrics such as woven, knit fabrics, denim, etc.
 - 3-stage belt drive to increase torque
 - Inner drum preset time forward and backward rotation
 - Pneumatic braking system for convenient door position alignment while machine stopping
 - Automatic washing time control and selection between up-to-temperature timing and immediate timing
 - Equipped with digital temperature controller for accurate temperature control
 - SUS 304 Stainless steel inner & outer drums, inner drum bore size Ø8mm
 - **NS-2700** series adopts direct steam heating method
 - **NS-2701** series adopts combination of direct and indirect steam heating methods

Optional Accessories:

Steam (Direct/Indirect Heating) Pneumatic Valve Assy (NS-2701 series)
Steam Pneumatic Valve Assy (NS-2700 series)
Steam Trap Set (NS-2701 series)
Manual Controlled Pneumatic Water Feeding System
Manual to Pneumatic Water Draining Control System
Additional Manual Water Draining Control System
Additional Pneumatic Water Draining Control System
Manual Chemical Feeding System
Speed Control System

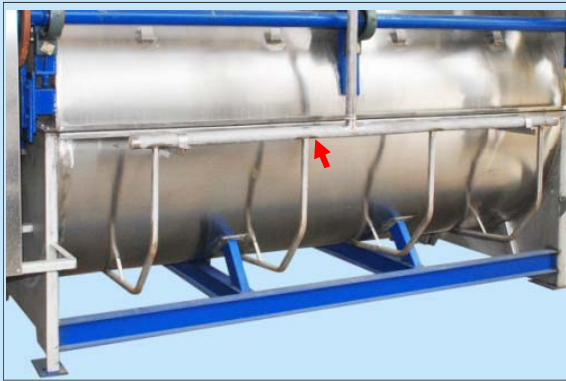

蒸汽直接加溫裝置(NS-2700)
Direct steam heating device (NS-2700)

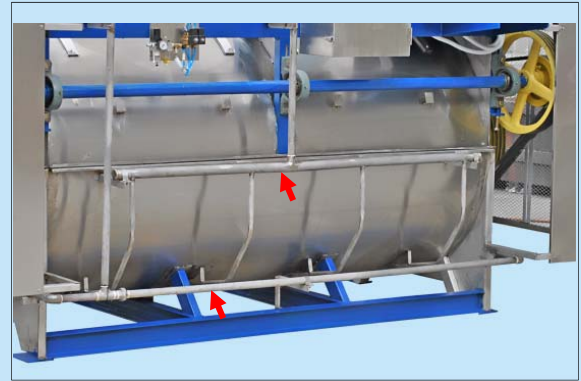

蒸汽直接加溫與間接加溫裝置(NS-2701)
Direct and indirect steam heating device(NS-2701)



三級皮帶傳動
3-stage pulley belt drive



手動排水裝置
Manual water discharge device




雙門 Two doors



氣動碟剎裝置
Pneumatic Disc Brake Device




蒸汽間接加溫內部管道圖(NS-2701)
Indirect heating device (NS-2701)

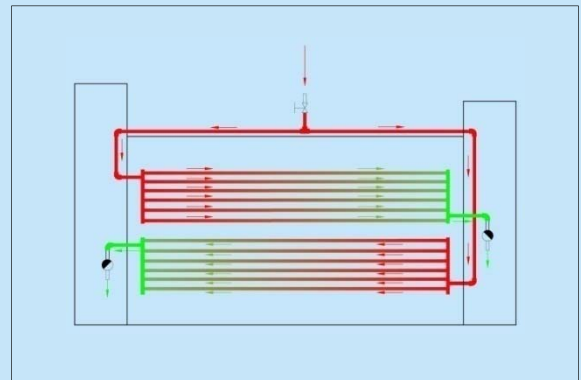

蒸汽間接加溫示意圖(NS-2701)
Indirect steam heating diagram (NS-2701)

選購件(Optional Accessories):

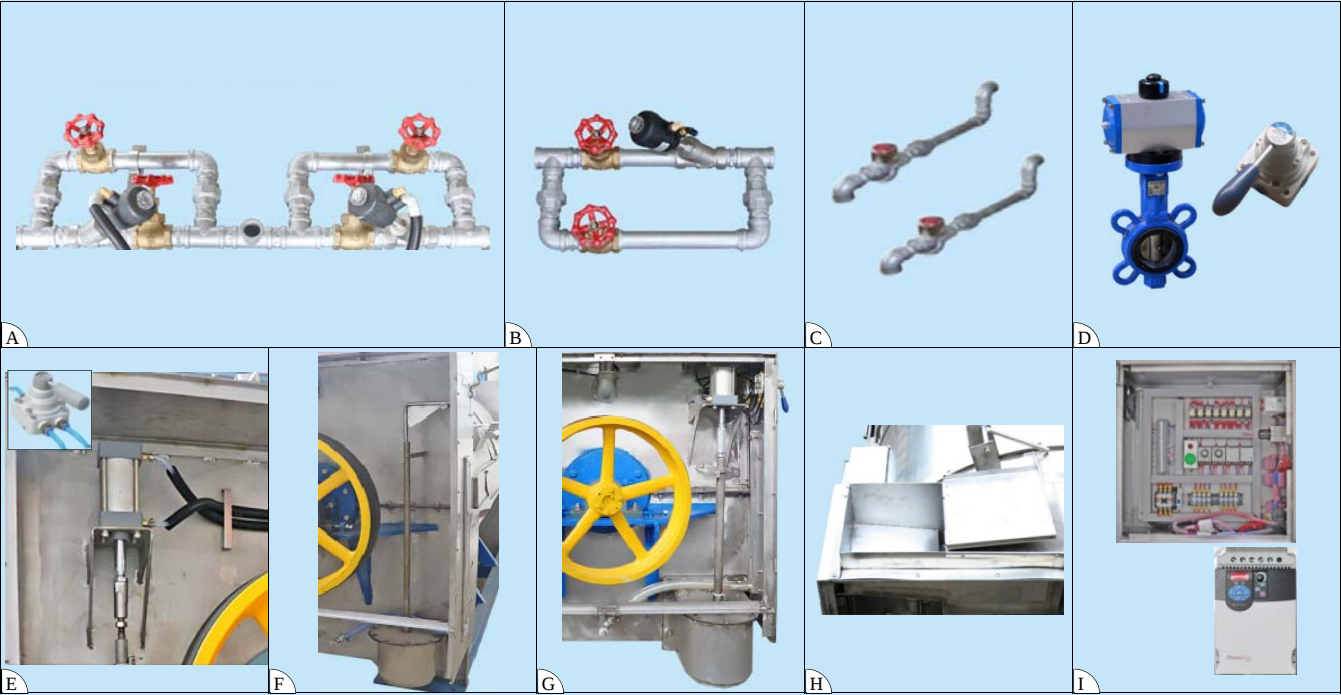

序號 Serial No.	編號 Part No.	中英文名稱 Description	適用於 Suitable for
A	O-I-01-2	蒸汽(直接/間接加溫)氣動閥總成-Ø1" Steam (Direct/Indirect Heating) Pneumatic Valve Assy-Ø1"	NS-2701-450/500/650
B	O-I-01-4	蒸汽氣動閥總成-Ø1" Steam Pneumatic Valve Assy-Ø1"	NS-2700-450/500/650
C	O-I-03-5	疏水閥總成-Ø1" Steam Trap Set-Ø1"	NS-2701-450/500/650
D	O-I-04-2	手控氣動入水系統-Ø2" Manual Controlled Pneumatic Water Feeding System-Ø2"	NS-2700-450/ NS-2701-450
	O-I-04-3	手控氣動入水系統-Ø3" Manual Controlled Pneumatic Water Feeding System-Ø3"	NS-2700-500/650, NS-2701-500/650
E	O-I-07-3	手動改氣動排水控制系統-Ø8" Manual to Pneumatic Water Draining Control System-Ø8"	NS-2700-450/500/650, NS-2701-450/500/650
F	O-I-08-1	另增手動排水控制系統-Ø8" Additional Manual Water Draining Control System-Ø8"	NS-2700-450/500/650, NS-2701-450/500/650
G	O-I-09-1	另增氣動排水控制系統-Ø8" Additional Pneumatic Water Draining Control System-Ø8"	NS-2700-450/500/650, NS-2701-450/500/650
H	O-I-53-02	手動入藥水盒系統 Manual Chemical Feeding System	NS-2700-450/500/650, NS-2701-450/500/650
I	O-I-10-4	速度控制器系統7.5kW Speed Control System 7.5kW	NS-2700-450, NS-2701-450
	O-I-10-5	速度控制器系統11kW Speed Control System 11kW	NS-2700-500/650, NS-2701-500/650

型號 Model	容量(LBS) Capacity	電源 Power Supply	馬達 (kW) Motor	耗蒸汽量(kg/hr) Steam Consumption	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	水容量(L) Water Capacity	入水口(inch) Water Inlet	出水口(inch) Water Outlet	洗衣速度 (RPM) Washing Speed	機身尺寸(mm) Machine Size (L×W×H)
NS-2700-450	450	3PH/380V/50Hz	7.5	170	Ø1100x2260x3	Ø1250x2440x2	1497	Ø3"x2pcs.	Ø8"x1pc	30~33	3300x1800x2000
NS-2701-450							1573				
NS-2700-500	500		11	200	Ø1220x2260x4	Ø1370x2440x2	1798				3300x1900x2080
NS-2701-500							1882				
NS-2700-650	650		11	260	Ø1370x2260x4	Ø1500x2440x2	2185				3300x2110x2150
NS-2701-650							2277				



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078
Fax: (852) 2785 3149

E-MAIL: info@ngaishing.com
Http://www.ngaishing.com