


Wassar 30S / 50S / 50H / 80S / 160S

自動洗衣脫水機

Automatic Washing Extractor



Wassar 30S

- 適用於襯衫、針織等衣物洗滌，其中Wassar 50H特別適合毛衫洗滌
- 前置式結構，水比小，配合變頻調速，滿足多種洗滌要求，降低洗衣成本
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作，可記憶20組程式，每組30個步驟
- 採用蒸汽直接加熱，即時/到溫計時選擇
- 標配1套電控氣動入水系統，配合流量計控制，使內膽水比控制更準確且操作方便(另可選購一套電控氣動入水系統)
- 配有手動加藥系統(Wassar 30~50為5L，Wassar 80~160為15L)
- SUS 304不鏽鋼內膽(內膽孔徑Ø6mm)，可滿足不同洗滌需求
- 具有自動脫水功能，極大地節省人力並顯著地提高生產效率

選購件：

- 自動入藥水系統
- 電控氣動入水系統
- 另增氣動排水控制系統

- Suitable for washing shirt, knitwear, etc. and Wassar 50H is ideal for sweater washing
- Front loading design, low liquor ratio, and inverter speed control; it can satisfy various wash requirements at low operating cost
- Adopt PLC and user friendly touch screen for operation; can memorize 20 programs, each with 30 steps
- Direct steam heating, immediate/up-to temperature timing modes available for selection
- With one set of electric controlled pneumatic water feeding system plus flowmeter for accurate water ratio control and easy operation(another set of electric controlled pneumatic water feeding system can also be mounted as an option)
- With manual chemical feeding system (5L for Wassar 30~50, 15L for Wassar 80~160)
- SUS 304 inner drum (hole size Ø6mm) can satisfy different requirements in washing process
- With automatic extracting function, saving labor and high efficiency

Optional Accessories:

- Automatic chemical feeding system
- Electric controlled pneumatic water feeding system
- Additional pneumatic water draining control system

跟機件 Standard Accessories:



單排水系統
Single outlet water draining system



入水流量計
Water inlet flowmeter

選購件 Optional Accessories:



O-I-21-01-05-05

自動入藥水連水泵總成(5L+5L)

Automatic Chemical Feeding with Pump
Assembly (5L+5L)

O-I-21-01-05

自動入藥水系統(5L)


Automatic Chemical Feeding System (5L)

購買O-I-21-01-05單個藥水盒之前，需先
購買O-I-21-01-05-05套裝藥水盒(Wassar
30~50最多可安裝4個藥水盒，Wassar
80~160最多可安裝6個藥水盒)

When placing order for O-I-21-01-05,
customer must include O-I-21-01-05-05 in
the order too. (Wassar 30~50 maximum can
install 4 chemical tanks; Wassar 80~160
maximum can install 6 chemical tanks)



電控氣動入水系統
Electric Controlled Water
Feeding System

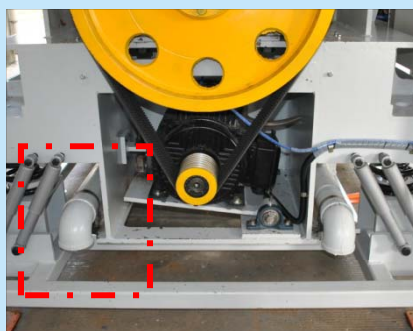

另增氣動排水控制系統
Additional Pneumatic Water
Draining Control System

型號 Model	容量(kg) Capacity	內膽容積(m³) Inner Drum Volume	電源 Power Supply	馬達(kW) Motor	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	洗水轉速 (RPM) Washing Speed	脫水轉速 (RPM) Extracting Speed	機身尺寸(mm) Machine Size
Wassar 30S	30	0.3	3PH/380V/50Hz	3	Ø900x496x2	Ø973x640x2	20~36	600	1600x1500x2000
Wassar 50S	50	0.5		4	Ø1080x626x2	Ø1152x798x2	25~40	600	1620x1700x2050*
Wassar 50H	50	0.5		7.5	Ø1080x626x2	Ø1152x798x2	25~40	1000	1620x1700x2050*
Wassar 80S	80	0.8		7.5	Ø1200x750x2	Ø1280x910x3	20~35	500	2000x2110x2150*
Wassar 160S	160	1.6		15	Ø1470x905x3	Ø1540x1125x3	20~35	400	1980x2350x2110*



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com