

NS-9302


小型點樸機

Small Spot Welding Machine



- 適用於領(上級領/下級領)、袖口的點樸
- 雙操作平台交替式操作，提高工作效率
- 自動收料於工作檯後方並整齊疊放
- 上模採用電加熱及數字溫度控制器控制溫度
- 上模採用快速翻轉設計，維護保養更方便
- 可根據不同面料點樸需求，設置不同的點樸時間和溫度，最高設計溫度200°C
- 可根據工作需要選擇腳踏啟動或按制啟動
- 鋁合金上下模，配合表面鐵氟龍層，使台面不易髒污，經久耐用

- Suitable for spot welding of collar(upper collar & collar band) and cuff
- Double platform design to enable alternate operation with increased productivity
- Automatic material collection and stacked behind the worktable in orderly manner
- The upper mould adopts electric heating and digital thermostat to control the temperature
- The upper mould adopts a fast flipping design for easy maintenance
- Welding time & temperature can be set to adapt to different fabrics, with max. set temperature: 200°C
- Starting mode can be switchable between foot pedal or press button at users' discretion
- Aluminum alloy upper and lower moulds with Teflon coating to enable the countertop to be durable and less prone to dirt

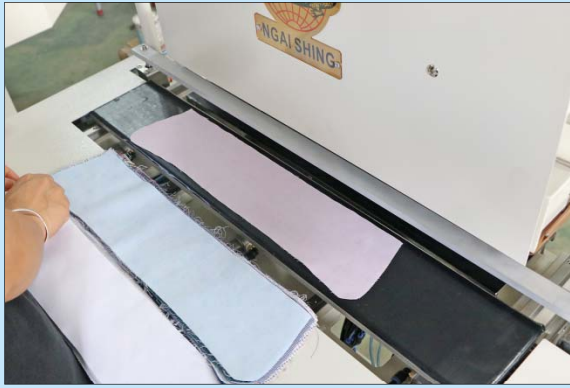


放料操作 Loading





放料操作 Loading



收料區 Unloading

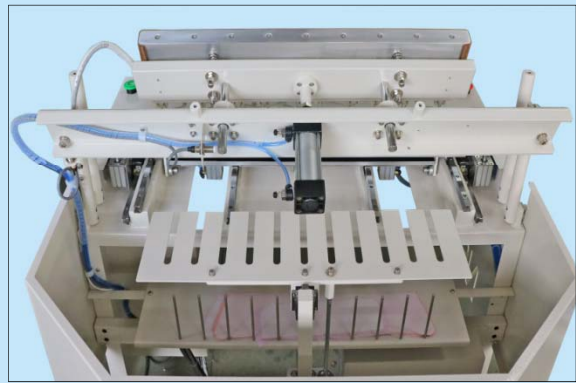

快速翻轉上模清潔設計
Quick flipping upper mould for
cleaning design

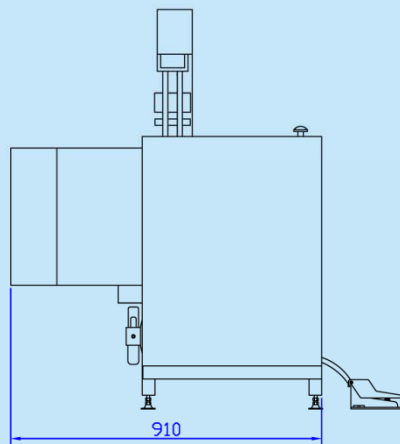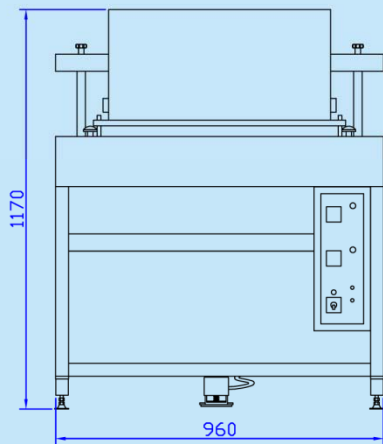

機身外形尺寸圖
Machine external
dimensions diagram

型號 Model	電源 Power Supply	總功率(kW) Total Power	發熱線功率(kW) Heater Power	最大工作尺寸(mm) Max. Working Width	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	最高設計溫度(°C) Max. Design Temperature	機身尺寸(mm) Machine Size
NS-9302	1PH/220V/50Hz	2.8	2.7	600×100	5	9.2	200	960×910×1170



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com