

NS-2700-70~200-PD / NS-2701-70~200-PD

工業自動洗衣機

Automatic Industrial Washing Machine



NS-2700-200-PD

- 適用於各種梭織、針織、牛仔衣物的普洗、酵洗、套色
- 採用高速微處理器結合7寸彩色觸摸屏，智能高效的人機對話界面，即時顯示工作狀態
- 內膽可定時正、逆轉動
- 配備氣動剎車系統，選購速度控制系統後可實現停機自動對門功能
- 採用氣動入水系統(標配1個)配合壓力式水位感應器，可實現定量自動入水
- 採用氣動排水系統(標配1個)，操作更方便
- 採用氣動入蒸汽系統，配合溫度控制系統，實現自動加溫或恆溫功能
- 自動洗衣時間及到溫計時與即時計時方式選擇
- 內外膽採用SUS 304不鏽鋼，NS-2700/2701-70~100-PD內膽孔徑Ø6mm，NS-2700/2701-200-PD內膽孔徑Ø8mm
- **NS-2700** 系列採用蒸汽直接加溫
- **NS-2701** 系列採用蒸汽直接加溫與間接加溫相結合

選購件：

速度控制器連停機自動對門系統
流量計自動入水系統
自動氣動入水系統
疏水閥總成(NS-2701系列)
特造小間距33~38mm


- Suitable for garment wash, enzyme wash and tinting of garments of various fabrics such as woven, knit fabrics, denim.
- Adopt high-speed microprocessor combined with 7-inch color touch screen with intelligent and highly efficient human-machine interface to display the working status in real-time
- Inner drum can rotate forward and backward at set interval
- Equipped with pneumatic braking system, in conjunction with optional speed controller system to enable automatic door alignment after machine shutdown
- Equipped with a pneumatic water inlet system and a pressure type water level sensor to enable quantitative automatic water inlet
- Equipped with a pneumatic drainage system to facilitate operation
- Equipped with a pneumatic steam inlet system combined with a temperature control system to achieve automatic heating or constant temperature function
- With automatic washing timer, preset temperature timer and real-time timer modes for selection
- SUS 304 Stainless steel inner & outer drums, NS-2700/2701-70~100-PD Inner drum bore size Ø6mm; NS-2700/2701-200-PD Inner drum bore size Ø8mm;
- **NS-2700** series adopts direct steam heating
- **NS-2701** series adopts direct & indirect steam heating

Optional Accessories:

Speed controller with automatic door alignment system after shutdown
Automatic water inlet system with flowmeter
Automatic pneumatic water inlet system
Steam Trap Set (NS-2701 series)
Customized spacing 33~38mm



蒸汽直接加溫裝置(NS-2700-70~100)
Direct steam heating device (NS-2700-70~100)

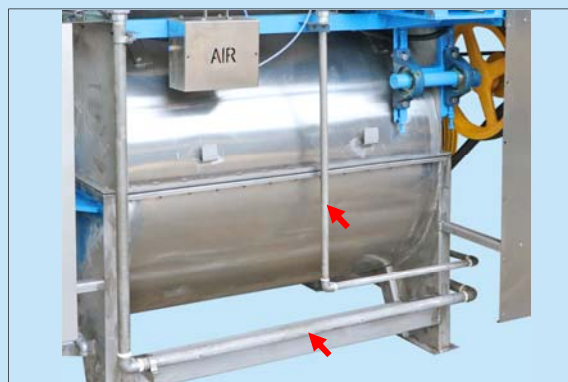

蒸汽直接加溫與間接加溫裝置(NS-2701-70~100)
Direct and indirect steam heating device(NS-2701-70~100)



蒸汽直接加溫裝置(NS-2700-200)
Direct steam heating device (NS-2700-200)




蒸汽直接加溫與間接加溫裝置(NS-2701-200)
Direct and indirect steam heating device(NS-2701-200)



氣動入水裝置
Pneumatic water inlet device




氣動碟剎裝置
Pneumatic Disc Brake Device

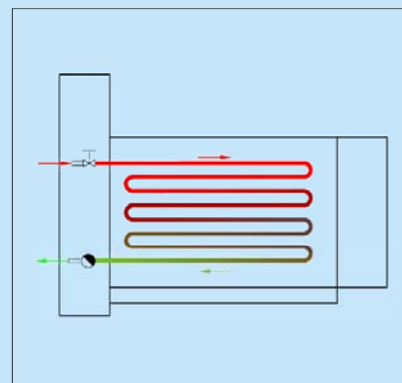

蒸汽間接加溫示意圖(NS-2701系列)
Indirect steam heating diagram
(NS-2701 series)





氣動排水裝置
Pneumatic drainage device

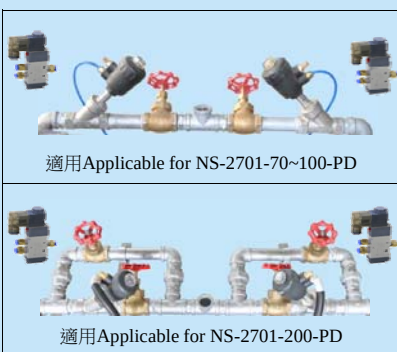

蒸汽(直接/間接加溫)氣動閥總成-Ø1"
Steam (Direct/Indirect Heating) Pneumatic
Valve Assy-Ø1"



蒸汽氣動閥總成-Ø1" (NS-2700)
Steam Pneumatic Valve Assy-Ø1"
(NS-2700)

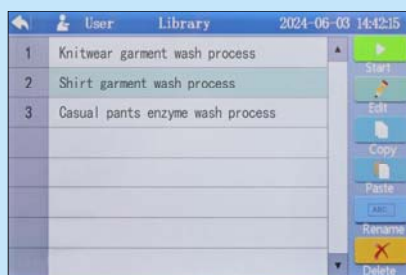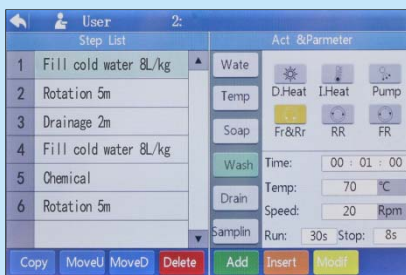

《自動洗衣控制系統Automatic laundry control system HMI》

選購件Optional Accessories:



序號 Serial No.	編號 Part No.	中英文名稱Description	適用於Suitable for
A	O-I-04-4-1	自動氣動入水系統-Ø1½" Automatic pneumatic water feeding system-Ø1½"	NS-2700-70~100-PD, NS-2701-70~100-PD
	O-I-04-2-1	自動氣動入水系統-Ø2" Automatic pneumatic water feeding system-Ø2"	NS-2700-200-PD, NS-2701-200-PD
B	O-I-67-04	流量計自動入水系統-Ø1½" Water Counter Meter Automatic Water Feeding System-Ø1½"	NS-2700-70~100-PD, NS-2701-70~100-PD
	O-I-67-01	流量計自動入水系統-Ø2" Water Counter Meter Automatic Water Feeding System-Ø2"	NS-2700-200-PD, NS-2701-200-PD
C	O-I-91-01	速度控制器連停機自動對門系統 1.5kW Speed controller with automatic door alignment system after shutdown 1.5kW	NS-2700-70-PD, NS-2701-70-PD
	O-I-91-02	速度控制器連停機自動對門系統 2.2kW Speed controller with automatic door alignment system after shutdown 2.2kW	NS-2700-100-PD, NS-2701-100-PD
	O-I-91-03	速度控制器連停機自動對門系統 4kW Speed controller with automatic door alignment system after shutdown 4kW	NS-2700-200-PD, NS-2701-200-PD
D	O-I-03-3	疏水閥總成-Ø1/2" Steam Trap Set-Ø1/2"	NS-2701-70~100-PD
	O-I-03-4	疏水閥總成-Ø1" Steam Trap Set-Ø1"	NS-2701-200-PD
33mm	O-I-93-07	特造小間距33mm Customized spacing 33mm	NS-2700-70-PD
	O-I-93-08	特造小間距 33mm Customized spacing 33mm	NS-2701-70-PD
	O-I-93-09	特造小間距33mm Customized spacing 33mm	NS-2700-100-PD
	O-I-93-10	特造小間距 33mm Customized spacing 33mm	NS-2701-100-PD
38mm	O-I-93-11	特造小間距 38mm Customized spacing 38mm	NS-2700-200-PD
	O-I-93-12	特造小間距 38mm Customized spacing 38mm	NS-2701-200-PD

型號 Model	容量 (LBS) Capacity	電源 Power Supply	馬達 (kW) Motor	耗蒸汽量(kg/hr) Steam Consumption	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	水容量(L) Water Capacity	入水口(inch) Water Inlet	出水口(inch) Water Outlet	洗衣速度 (RPM) Washing Speed	機身尺寸(mm) Machine Size
NS-2700-70-PD	70	3PH/380V/50Hz	1.5	45	Ø800×700×2	Ø940×840×1.5	291	Ø1½" x1pc	Ø6" x1pc	30~33	1450×1380×1700
NS-2701-70-PD							301				
NS-2700-100-PD	100		2.2	60	Ø800×990×2	Ø940×1100×1.5	385				1700×1380×1700
NS-2701-100-PD							398				
NS-2700-200-PD	200		4	100	Ø1100×1090×3	Ø1250×1270×1.5	706	Ø2" x1pc			2090×1860×2030
NS-2701-200-PD							744				



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com