

NS-2700-450~650-PD / NS-2701-450~650-PD

工業自動洗衣機

Automatic Industrial Washing Machine



NS-2700-500-PD

- 適用於各種梭織、針織、牛仔衣物的普洗、酵洗、套色
- 採用高速微處理器結合7寸彩色觸摸屏，智能高效的人機對話界面，即時顯示工作狀態
- 內膽可定時正、逆轉動
- 採用氣動剎車裝置，選購速度控制系統後可實現停機自動對門功能
- 採用氣動入水系統(標配1個)配合壓力式水位感應器，可實現定量自動入水
- 採用氣動排水系統(標配1個)，操作更方便
- 採用氣動入蒸汽系統，配合溫度控制系統，實現自動加溫或恆溫功能
- 自動洗衣時間及到溫計時與即時計時方式選擇
- 內外膽採用SUS 304不鏽鋼，內膽孔徑Ø8mm
- **NS-2700**系列採用蒸汽直接加溫
- **NS-2701**系列採用蒸汽直接加溫與間接加溫相結合


選購件：

速度控制器連停機自動對門系統
流量計自動入水系統
自動氣動入水系統
另增自動排水控制系統
疏水閥總成(NS-2701系列)
特造小間距38mm


- Suitable for garment wash, enzyme wash and tinting of garments of various fabrics such as woven, knit fabrics, denim.
- Adopt high-speed microprocessor combined with 7-inch color touch screen with intelligent and highly efficient human-machine interface to display the working status in real-time
- Inner drum can rotate forward and backward at set interval
- Equipped with pneumatic braking system, in conjunction with optional speed controller system to enable automatic door alignment after machine shutdown
- Equipped with a pneumatic water inlet system and a pressure type water level sensor to enable quantitative automatic water inlet
- Equipped with a pneumatic drainage system to facilitate operation
- Equipped with a pneumatic steam inlet system combined with a temperature control system to achieve automatic heating or constant temperature function
- With automatic washing timer, preset temperature timer and real-time timer modes for selection
- SUS 304 Stainless steel inner & outer drums, inner drum bore size Ø8mm
- **NS-2700** series adopts direct steam heating
- **NS-2701** series adopts direct & indirect steam heating

Optional Accessories:

Speed controller with automatic door alignment system after shutdown
Automatic water inlet system with flowmeter
Automatic pneumatic water inlet system
Automatic drainage control system
Steam Trap Set (NS-2701 series)
Customized spacing 38mm

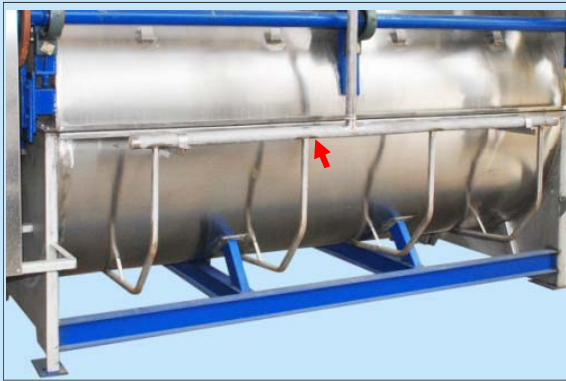


蒸汽直接加溫裝置(NS-2700)
Direct steam heating device (NS-2700)

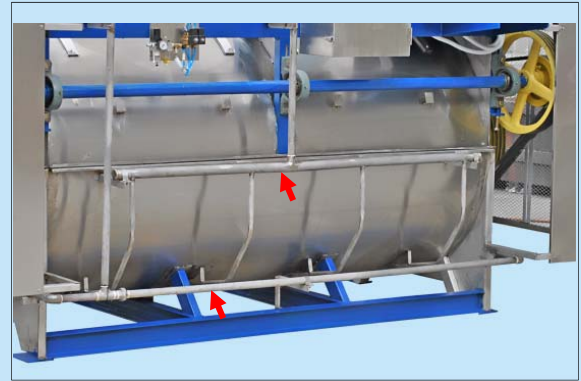

蒸汽直接加溫與間接加溫裝置(NS-2701)
Direct and indirect steam heating device(NS-2701)



氣動碟剎裝置
Pneumatic Disc Brake Device

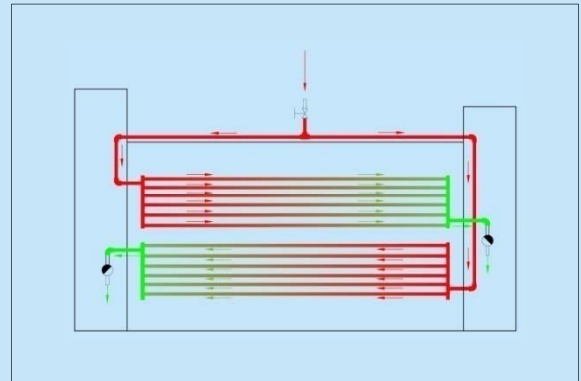


蒸汽間接加溫示意圖(NS-2701)
Indirect steam heating diagram (NS-2701)



氣動入水裝置
Pneumatic water inlet device





氣動排水裝置
Pneumatic drainage device

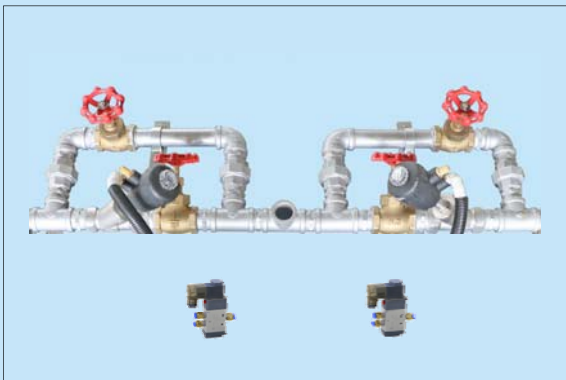

蒸汽(直接/間接加溫)氣動閥總成-Ø1" (NS-2701)
Steam (Direct/Indirect Heating) Pneumatic Valve Assy-Ø1" (NS-2701)





蒸汽氣動閥總成-Ø1" (NS-2700)
Steam Pneumatic Valve Assy-Ø1" (NS-2700)

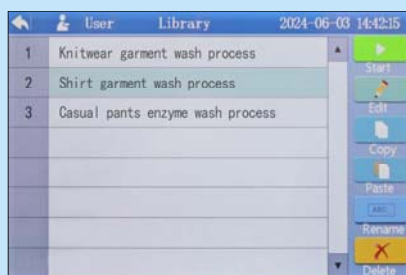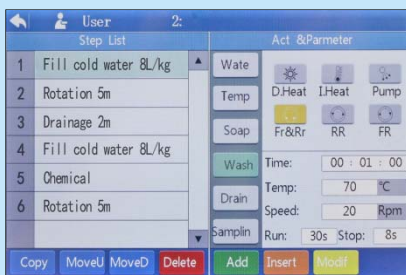

《自動洗衣控制系統Automatic laundry control system HMI》

選購件Optional Accessories:



序號 Serial No.	編號 Part No.	中英文名稱 Description	適用於 Suitable for
A	O-I-04-2-1	自動氣動入水系統-02" Automatic pneumatic water feeding system-02"	NS-2700-450-PD, NS-2701-450-PD
	O-I-04-3-1	自動氣動入水系統-03" Automatic pneumatic water feeding system-03"	NS-2700-500~650-PD, NS-2701-500~650-PD
B	O-I-67-01	流量計自動入水系統-02" Water Counter Meter Automatic Water Feeding System-02"	NS-2700-450-PD, NS-2701-450-PD
	O-I-67-02	流量計自動入水系統-03" Water Counter Meter Automatic Water Feeding System-03"	NS-2700-500~650-PD, NS-2701-500~650-PD
C	O-I-09-2	另增自動排水控制系統-08" Additional Automatic Water Draining Control System -08"	NS-2700-450~650-PD, NS-2701-450~650-PD
D	O-I-91-04	速度控制器連停機自動對門系統7.5kW Speed controller with automatic door alignment system after shutdown 7.5kW	NS-2700-450-PD, NS-2701-450-PD
	O-I-91-05	速度控制器連停機自動對門系統11kW Speed controller with automatic door alignment system after shutdown 11kW	NS-2700-500~650-PD, NS-2701-500~650-PD
E	O-I-03-5	疏水閥總成-01" Steam Trap Set-01"	NS-2701-450~650-PD
38mm	O-I-93-13	特造小間距38mm Customized spacing 38mm	NS-2700-450-PD
	O-I-93-14	特造小間距38mm Customized spacing 38mm	NS-2701-450-PD
	O-I-93-15	特造小間距38mm Customized spacing 38mm	NS-2700-500-PD
	O-I-93-16	特造小間距38mm Customized spacing 38mm	NS-2701-500-PD
	O-I-93-17	特造小間距38mm Customized spacing 38mm	NS-2700-650-PD
	O-I-93-18	特造小間距38mm Customized spacing 38mm	NS-2701-650-PD

型號 Model	容量 (LBS) Capacity	電源 Power Supply	馬達 (kW) Motor	耗蒸汽量(kg/hr) Steam Consumption	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	水容量(L) Water Capacity	入水口(inch) Water Inlet	出水口(inch) Water Outlet	洗衣速度 (RPM) Washing Speed	機身尺寸(mm) Machine Size
NS-2700-450-PD	450	3PH/380V/50Hz	7.5	170	Ø1100×2260×3	Ø1250×2440×2	1497	Ø2"×2pcs.	Ø8"×1pc	30~33	3300×1800×2000
NS-2701-450-PD							1573				
NS-2700-500-PD	500		11	200	Ø1220×2260×4	Ø1370×2440×2	1798	Ø3"×2pcs.			3300×1900×2080
NS-2701-500-PD							1882				
NS-2700-650-PD	650		11	260	Ø1370×2260×4	Ø1500×2440×2	2185				3300×2110×2150
NS-2701-650-PD							2277				



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com