


NS-92A-HB

自動修領腳機

Automatic Collar Contour Trimmer



最小切領高度(mm)
Min.Cutting Depth

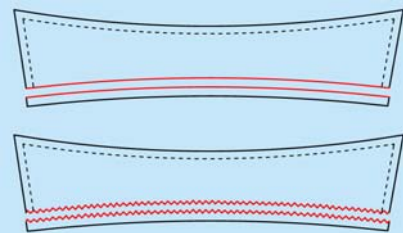

無牙刀、有牙刀修腳效果
Trimming effects by straight cutting
blade and toothed cutting blade

- 適用於修領腳
- 把上級領腳等邊切齊，使縫下級時更加準確
- 採用PLC控制器控制及人性化操作界面觸摸顯示屏操作，可記憶30組程式
- 數碼調節傍位，方便用戶操作，統一產品質量
- 自動送料，提高操作安全
- 備吹風系統，可將廢布屑吹入收集箱
- 可調切刀裝置，適合不同領型曲線需要
- 底部收領紙能自動移動確保最佳切割效果
- Suitable for collar bottom trimming
- Contour trimming of upper collar enables accurate attachment to collar band
- Adopt PLC and user-friendly touch screen for operation, capable of memorizing 30 sets of programs
- With digitally adjustable guide system for easy operation and product quality assurance
- Enhanced operational safety with automatic feeding system
- Equipped with blower system to blow fabric scraps into collecting box
- Adjustable blade design to cater for various collar curve trimming
- With automatically movable bottom paper to ensure perfect trimming effect



修領腳刀角度調節
Cutting blade angle adjustment



數碼調節XY軸傍位
Digital adjustment of axis XY guide device



觸摸顯示屏控制操作
Touch screen operation



自動送料修領腳操作
Collar trimming operation with automatic feeding

跟機件 Standard Accessories		選購件 Optional Accessories	易損件 Consumable Parts
 C10-OT-001-03-7 無牙刀14"(已裝機) 14"Cutter without teeth(standard equipped)		 C10-OT-001-02-4 有牙刀14" 14" Cutter with teeth	 M20-018-2M 收領紙 Bottom paper
 M20-018-2M 收領紙(3張) Bottom paper (3pcs)			

型號 Model	電源 Power Supply	總功率(kW) Total Power	最小切領高度(mm) Min.Cutting Depth	XY軸調節範圍(mm) Adjustment of axis XY	切刀長度(inch) Cutter length	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-92A-HB	1PH/220V/50Hz	0.4	35	0~47	14	5	20	680×720×1265



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com