


# NS-2800

## 工業乾衣機

### Industrial Drying Tumbler

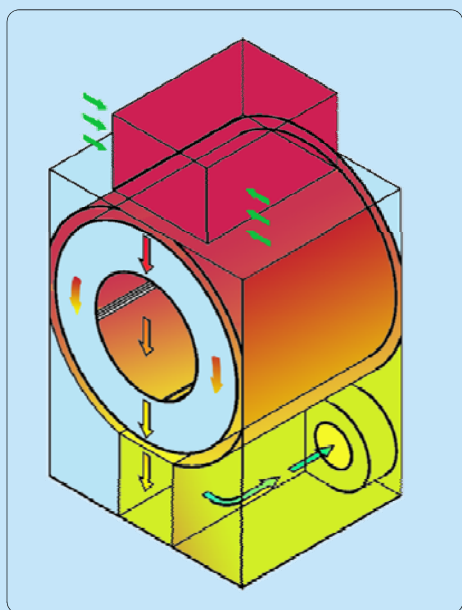

工作原理示意圖  
Working Principle Diagram



NS-2800-300-S

- 適用於烘干各種棉織、牛仔、梭織、針織、化纖等衣物
- 採用單片微處理器控制及人性化觸摸顯示屏操作
- 內膽可定時正、反轉動，使衣物均衡滾動
- 內膽主要部件採用SUS 304不銹鋼，表面光潔耐用
- 備蒸汽熱(30~300磅)、電熱(30~300磅)、瓦斯熱型乾衣機(100~300磅)，不同容量乾衣機供選擇
- 設有門安全制，提高操作安全
- 跟機已安裝自動止回風門系統

#### 選購件：

疏水閥總成  
蒸汽氣動閥總成  
蒸汽電磁閥總成  
內膽進風隔塵箱  
冷風門控制裝置

- Suitable for drying garments made of various fabrics such as cotton, denim, woven fabric, knitted fabric, synthetic fabric, etc
- Adopt single chip microprocessor and user friendly touch screen for operation
- Preset forward and backward rotation of inner drum enable garment to change their locations and attitudes effectively
- Main parts of inner drum is made of SUS304 stainless steel, smooth and durable
- Drying tumblers of steam heated(30~300LBS), electric heated(30~300LBS), and gas heated(100~300LBS) are available for selection
- Equipped with door safety switch for safe operation
- Automatic wind return system has been mounted as standard

#### Optional Accessories :

Steam Trap Set  
Steam Pneumatic Valve Assy  
Steam Solenoid Valve Assy  
Dust Separating Box for Air Inlet of Inner Drum  
Cool Air Damper Controller

工業乾衣機 – 蒸汽熱型    Industrial Drying Tumbler -steam heated

| 型號 Model                            | NS-2800-30-S  | NS-2800-50-S   | NS-2800-70-S   | NS-2800-100-S  | NS-2800-200-S  | NS-2800-300-S  |
|-------------------------------------|---------------|----------------|----------------|----------------|----------------|----------------|
| 容量 (LBS) Capacity                   | 30            | 50             | 70             | 100            | 200            | 300            |
| 內膽尺寸 (mm) Inner Drum Size           | Ø787×533×1.5  | Ø965×533×1.5   | Ø965×865×1.5   | Ø1145×865×1.5  | Ø1372×1041×1.5 | Ø1778×1041×2   |
| 內膽容積 (m³) Inner Drum Volume         | 0.26          | 0.39           | 0.63           | 0.89           | 1.54           | 2.58           |
| 電源 Power Supply                     | 3PH/380V/50Hz |                |                |                |                |                |
| 總功率 (kW) Total Power                | 2             | 2.8 kW         | 2.8            | 2.8            | 4.6            | 8.6            |
| 內膽馬達功率 (kW) Inner Drum Motor Power  | 0.75          | 1.1 kW         | 1.1            | 1.1            | 2.2            | 4              |
| 排風馬達功率 (kW) Exhaust Fan Motor Power | 1.1           | 1.5 kW         | 1.5            | 1.5            | 2.2            | 2 × 2.2        |
| 蒸汽壓力 (kgf/cm²) Steam Pressure       | 3~3.5         |                |                |                |                |                |
| 耗蒸汽量 (kg/h) Steam Consumption       | 20            | 30             | 45             | 60             | 120            | 180            |
| 內膽轉速 (RPM) Inner Drum Speed         | 27            | 27             | 27             | 27             | 25             | 22             |
| 機身尺寸 (mm) Machine Size              | 925×1200×1825 | 1050×1200×1950 | 1050×1540×1950 | 1220×1665×2050 | 1470×1800×2010 | 1860×2060×2250 |

工業乾衣機 – 電熱型    Industrial Drying Tumbler- electric heated

| 型號 Model                            | NS-2800-30-E  | NS-2800-50-E   | NS-2800-70-E   | NS-2800-100-E  | NS-2800-200-E  | NS-2800-300-E  |
|-------------------------------------|---------------|----------------|----------------|----------------|----------------|----------------|
| 容量 (LBS) Capacity                   | 30            | 50             | 70             | 100            | 200            | 300            |
| 內膽尺寸 (mm) Inner Drum Size           | Ø787× 533×1.5 | Ø965× 533×1.5  | Ø965×865×1.5   | Ø1145×865×1.5  | Ø1372×1041×1.5 | Ø1778×1041×2   |
| 內膽容積 (m³) Inner Drum Volume         | 0.26          | 0.39           | 0.63           | 0.89           | 1.54           | 2.58           |
| 電源 Power Supply                     | 3PH/380V/50Hz |                |                |                |                |                |
| 總功率 (kW) Total Power                | 16.4          | 22             | 26.2           | 34             | 51.4           | 71             |
| 發熱線功率 (kW) Heater Power             | 14.4          | 19.2           | 23.4           | 31.2           | 46.8           | 62.4           |
| 內膽馬達功率 (kW) Inner Drum Motor Power  | 0.75          | 1.1            | 1.1            | 1.1            | 2.2            | 4              |
| 排風馬達功率 (kW) Exhaust Fan Motor Power | 1.1           | 1.5            | 1.5            | 1.5            | 2.2            | 2 × 2.2        |
| 內膽轉速 (RPM) Inner Drum Speed         | 27            | 27             | 27             | 27             | 25             | 22             |
| 機身尺寸 (mm) Machine Size              | 925×1200×1825 | 1050×1200×1950 | 1050×1540×1950 | 1220×1665×2050 | 1470×1800×2010 | 1860×2060×2250 |




工業乾衣機 – 瓦斯熱型    Industrial Drying Tumbler- gas heated

| 型號 Model                               | NS-2800-100-G  | NS-2800-200-G  | NS-2800-300-G  |
|----------------------------------------|----------------|----------------|----------------|
| 容量 (LBS) Capacity                      | 100            | 200            | 300            |
| 內膽尺寸 (mm) Inner Drum Size              | Ø1145×865×1.5  | Ø1372×1041×1.5 | Ø1778×1041×2   |
| 內膽容積 (m³) Inner Drum Volume            | 0.89           | 1.54           | 2.58           |
| 燃氣使用壓力 (mbar) Gas Working Pressure     | 20~35          |                |                |
| 石油氣消耗量 (kg/hr) LPG Consumption         | 3.7            | 7.4            | 11.1           |
| 天然氣消耗量 (m³/hr) Natural Gas Consumption | 4.8            | 9.6            | 14.4           |
| 電源 Power Supply                        | 3PH/380V/50Hz  |                |                |
| 總功率 (kW) Total Power                   | 2.8            | 4.6            | 8.6            |
| 內膽馬達功率 (kW) Inner Drum Motor Power     | 1.1            | 2.2            | 4              |
| 排風馬達功率 (kW) Exhaust Fan Motor Power    | 1.5            | 2.2            | 2 × 2.2        |
| 內膽轉速 (RPM) Inner Drum Speed            | 27             | 25             | 22             |
| 機身尺寸 (mm) Machine Size                 | 1220×1665×2050 | 1470×1800×2010 | 1860×2060×2250 |

## 跟機件Standard Accessories :



## 選購件Optional Accessories :

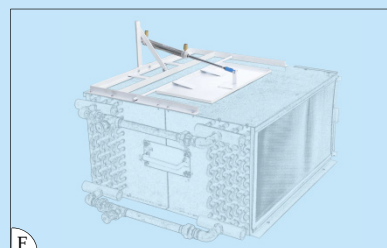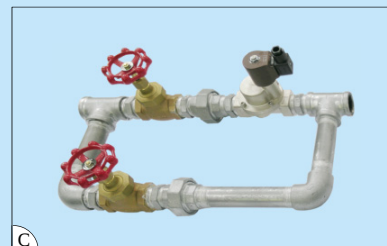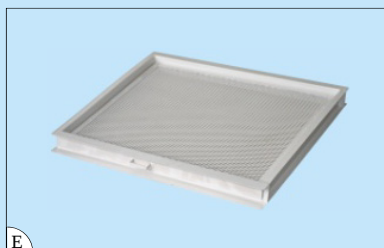

| 序號<br>Serial No. | 編號<br>Part No. | 中英文名稱Description                                       | 適用Application                                 |
|------------------|----------------|--------------------------------------------------------|-----------------------------------------------|
| A                | /              | 自動止回風門系統Automatic Air Damper System                    | 適用於 For NS-2800-30~300-S/E, NS-2800-100~300-G |
| B                | O-I-01-4       | 蒸汽氣動閥總成-Ø1" Steam Pneumatic Valve Assy-Ø1"             | 適用於 For NS-2800-30~300-S                      |
| C                | O-I-02-2       | 蒸汽電磁閥總成-Ø1" Steam Solenoid Valve Assy-Ø1"              | 適用於 For NS-2800-30~300-S                      |
| D                | O-I-03-2       | 疏水閥總成-Ø1" Steam trap set-Ø1"                           | 適用於 For NS-2800-30~300-S                      |
| E                | O-I-18-1       | 內膽進風隔塵箱Dust Separating Box for Air Inlet of Inner Drum | 適用於 For NS-2800-30-S/E                        |
|                  | O-I-18-2       |                                                        | 適用於 For NS-2800-50-S/E                        |
|                  | O-I-18-3       |                                                        | 適用於 For NS-2800-70-S/E                        |
|                  | O-I-18-4       |                                                        | 適用於 For NS-2800-100-S/E/G                     |
|                  | O-I-18-5       |                                                        | 適用於 For NS-2800-200-S/E/G                     |
|                  | O-I-18-6       |                                                        | 適用於 For NS-2800-300-S/E/G                     |
| F                | O-I-13-6       | 冷風門控制裝置 Cool Air Damper Controller                     | 適用於 For NS-2800-30-S                          |
|                  | O-I-13-5       |                                                        | 適用於 For NS-2800-50-S                          |
|                  | O-I-13-4       |                                                        | 適用於 For NS-2800-70-S                          |
|                  | O-I-13-3       |                                                        | 適用於 For NS-2800-100-S                         |
|                  | O-I-13-2       |                                                        | 適用於 For NS-2800-200-S                         |
|                  | O-I-13-1       |                                                        | 適用於 For NS-2800-300-S                         |



**藝誠(余氏)發展有限公司**  
**Ngai Shing Development Limited**

香港九龍長沙灣永康街52號地下  
G/F., 52 Wing Hong St.,  
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com  
Fax: (852) 2785 3149 Http://www.ngaishing.com

**NS-2800系列series**  
**加熱方式對比**  
**Heating Methods Comparison**

|                                                                                                                                              |                            |                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>蒸汽熱交換器<br/>Steam heat exchanger<br/>(30~300LBS)</p>     | <p>適用<br/>Application:</p> | <p>適於恤衫、針織、牛仔等衣物乾衣<br/>Suitable for drying shirt, knitted garments, jeans wear, etc.</p>                                                   |
|                                                                                                                                              | <p>優點<br/>Advantages:</p>  | <p>升溫穩定，溫度控制精確<br/>Stable heating up, accurate temperature control</p>                                                                     |
|                                                                                                                                              | <p>其它<br/>Others:</p>      | <p>廠房附近需有蒸汽供應及管道工程<br/>Steam supply near work floor and piping installation are needed</p>                                                 |
|  <p>電熱交換器<br/>Electric heat exchanger<br/>(30~300LBS)</p> | <p>適用<br/>Application:</p> | <p>適於恤衫、針織、牛仔等衣物乾衣<br/>Suitable for drying shirt, knitted garments, jeans wear, etc.</p>                                                   |
|                                                                                                                                              | <p>優點<br/>Advantages:</p>  | <p>安裝方便，無需管道工程<br/>Convenient installation because of no piping installation involved</p>                                                  |
|                                                                                                                                              | <p>其它<br/>Others:</p>      | <p>需當地有大功率三相電源供應，耗電量大<br/>Due to large power consumption, a local high-power 3PH power supply is needed</p>                                |
|  <p>瓦斯熱交換器<br/>Gas heat exchanger<br/>(100~300LBS)</p>    | <p>適用<br/>Application:</p> | <p>適於牛仔類衣物乾衣<br/>Suitable for drying jeans wear</p>                                                                                        |
|                                                                                                                                              | <p>優點<br/>Advantages:</p>  | <p>GAS加熱升溫快，加熱溫度高；減少空氣污染物排放量，綠色環保<br/>Fast heating up and high heating temperature; less emission of greenhouse gas &amp; eco-friendly</p> |
|                                                                                                                                              | <p>其它<br/>Others:</p>      | <p>需當地有相應GAS供應，不適合硫化物染料及敏感麵料乾衣<br/>Local GAS supply is needed. It does not suit for sulfide dyes and sensitive fabrics</p>                 |