


NS-6071

高頭車單針間骨線


Single Needle Post Bed Sewing Machine



	2	1500~2000RPM	DPx5 #11~14	



上工序
Last procedure

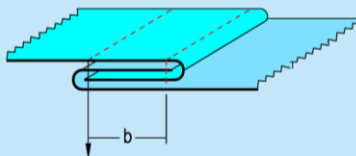

本工序
This procedure



- 適用於衣物側骨間線(標配)、袖圈間線(需選購特制配件)
- 針板、牙安裝在增高的平台上，方便撥平衣服
- 不鏽鋼防油裝置，可避免衣車高速運轉時衣車油沾污衣物
- 備有自動切線、自動返針和自動起靴功能
- 已安裝跟機壓腳：P-7-TZ-82 3/16" 高頭車右傍靴

跟機件：

縫紉機

選購件：

P-7-TZ-82 3/16" 高頭車右傍靴

P-7-TZ-82-2 1/8" 高頭車右傍靴

P-7-TZ-82-4 1/4" 高頭車右傍靴

- Suitable for garment side seam topstitching(standard) and armhole topstitching(optional specially made parts are needed)
- Needle plate and feed dog are mounted on an elevated platform for easy flattening of the sewn pieces
- Equipped with stainless steel oil proof device to prevent oil contamination of fabrics during high speed sewing operation
- With automatic thread cutting, back stitching and presser foot lift functions
- **Installed presser foot as standard:** P-7-TZ-82 3/16" Right compensated presser foot for post bed M/C

Standard Accessories:


Sewing head

Optional Accessories:

P-7-TZ-82 3/16" Right compensated presser foot for post bed M/C

P-7-TZ-82-2 1/8" Right compensated presser foot for post bed M/C


P-7-TZ-82-4 1/4" Right compensated presser foot for post bed M/C

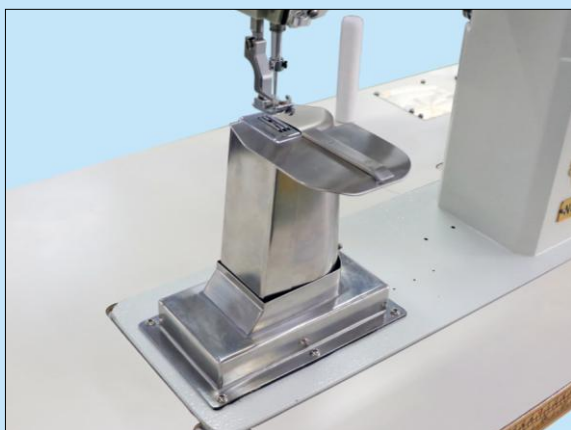

不鏽鋼防油裝置
Stainless steel oil proof device




三通油路潤滑系統
T-joint oil lubrication system

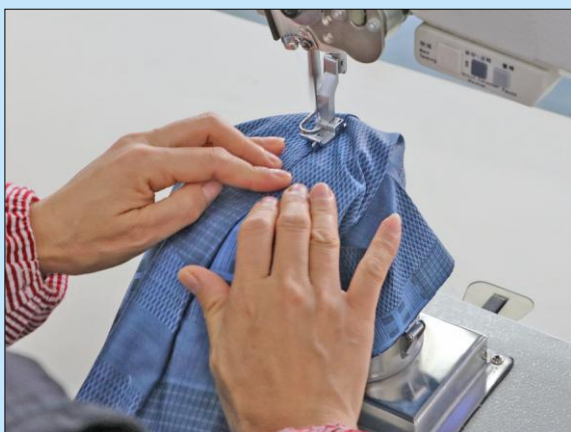

側骨間線操作
Side seam topstitch operation



袖圈間線操作
Armhole topstitch operation

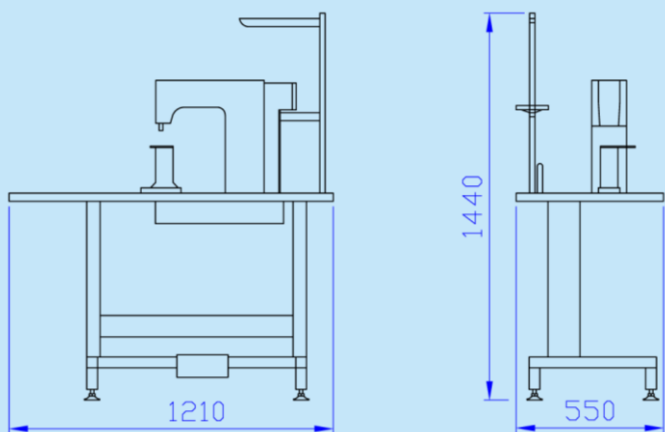

選購件Optional Accessories:



高頭車右傍靴
Right compensated
presser foot for post bed
M/C

型號 Model	電源 Power Supply	總功率(kW) Total Power	淨重(kg) Net Weight	機身尺寸(mm) Machine Size
NS-6071	1PH/220V/50Hz	0.75	101	1210x550x1410*



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com