



NS-9501D

自動轉頭雙袖山縫壓平機

Automatic Rotation Double Armhole Press

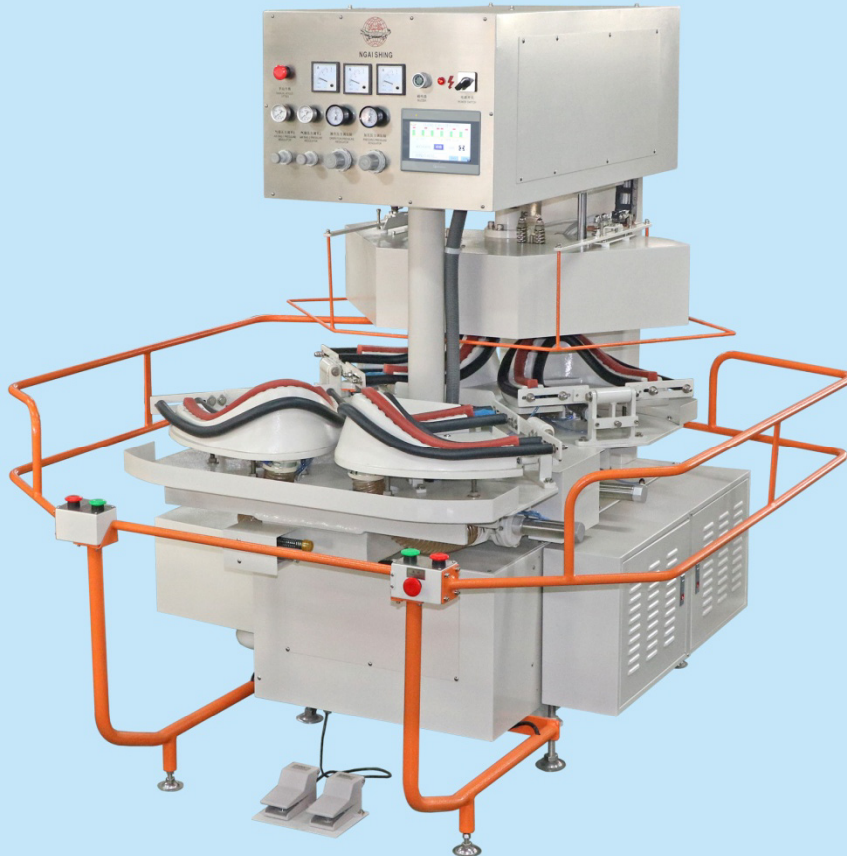

- 適用於襯衫雙袖山縫同時粘合壓熨
- 採用PLC可編程控制器控制及人性化觸摸顯示屏操作
- 自動旋轉式雙下模設計，每套下模可放兩件裁片，工作效率高
- 輕壓、重壓兩種壓熨方式供選擇設定，可滿足不同面料需求
- 上模採用電加熱，由六通道智能溫度模塊配合觸摸屏分區控制，溫度控制更精確
- 單套發熱上模配合雙下模交替式操作，電能利用率高
- 下模氣袋配合耐壓的高溫硅膠條，可消除袖山縫壓熨時袖山縫與後擔桿骨位的厚薄偏差，達到最佳壓熨效果
- 獨立真空抽濕泵，有助衣物定位，冷卻、定型效果佳
- 備有不同的袖山縫模，可來樣測試選擇合適的一款跟機模


選購件：

O-J-01-4 吹風冷卻系統(壓縮空氣)
各種袖山模(A款~K款)

- Suitable for fusing and pressing of double armholes of shirt simultaneously
- Adopt PLC and user friendly touch screen for operation
- Dual automatic rotation lower moulds, with two cut pieces placed in each lower mould, enables high efficiency
- Two pressing modes, i.e. light press and heavy press, are available for selection to cater for different fabrics
- Electric heated upper mould, zoning temperature control for high precision through 6-channel intelligent temperature module and touch screen
- Single upper heating mould works alternately with dual lower moulds, for high electricity utilization rate
- Lower mould airbag combined with pressure-proof high temperature silica rubber, can offset the thickness difference between armhole and back yoke seam, thereby to achieve perfect pressing effect
- With independent vacuum pump to facilitate garment fixing, cooling and shaping
- Different armhole moulds available for sample test and select one of them as standard

Optional Accessories :


O-J-01-4 Compressed air blowing cool down system
Various armhole moulds(type A~K)

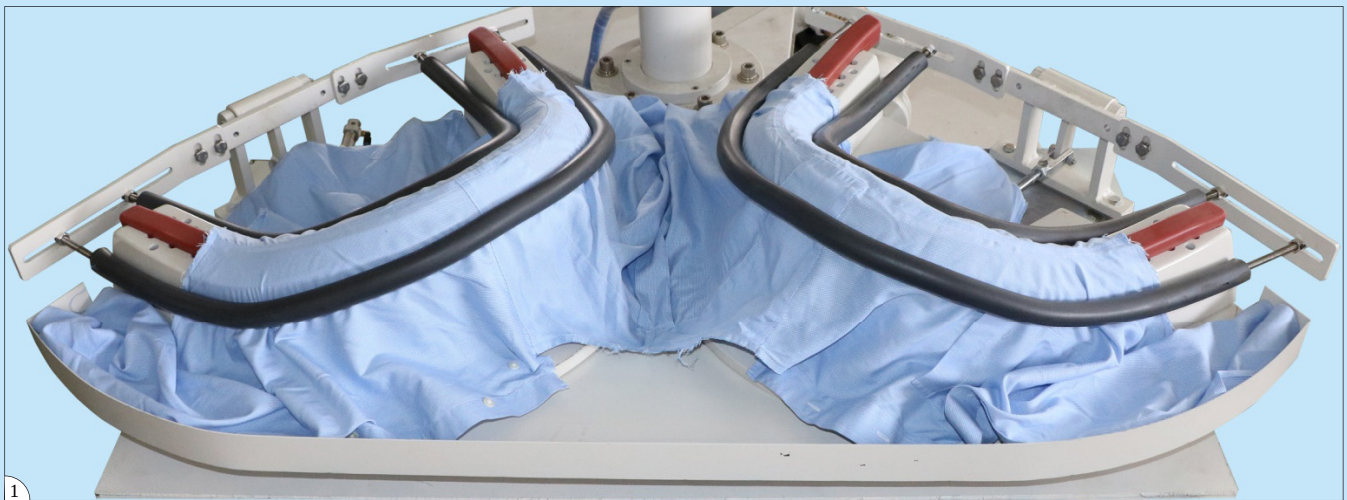

雙袖山縫可同時鋪料
Double armholes can be processed simultaneously



PLC可編程控制器控制及人性化操作界面觸摸顯示屏
操作
Adopt PLC and user friendly touch screen for operation

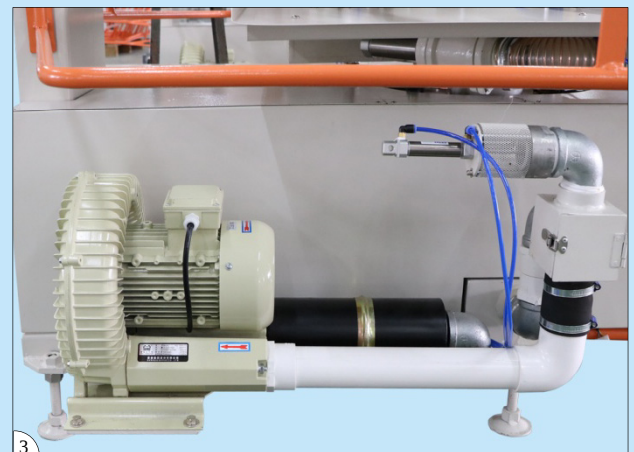

獨立真空泵，有助衣物定位，冷卻、定型效果
Independent vacuum pump facilitates garment positioning, cooling and shaping

型號 Model	電源 Power Supply	總功率(kW) Total Power	發熱線功率 (kW) Heater Power	真空泵功率(kW) Vacuum Pump Power	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	平均粘合壓力(kgf/cm ²) Average Fusing Pressure	淨重(kg) Net Weight	機身尺寸(mm) Machine Size
NS-9501D	3PH/380V/50Hz	6.5	4.8	1.5	5	434.5	2.5	1125	1950x2100x1950



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com