

Wassar 410L

自動洗衣脫水機

Automatic Washing Extractor



- 大直徑內膽設計，特別適用於對牛仔，休閒服等厚料衣物進行石洗和酵洗
- 前置式結構，水比小，配合變頻調速，滿足多種洗滌要求，降低洗衣成本
- 機身可傾斜，自動卸料
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作，可記憶20組洗衣程式，每組程式可設置30個步驟
- 採用蒸汽直接加熱，即時/到溫計時選擇
- 標配1套電控氣動入水系統，配合流量計控制，使內膽水比控制更準確且操作方便 (另可選購一套電控氣動入水系統)
- 配有手動加藥系統(30L)
- SUS 304不鏽鋼內膽(內膽孔徑Ø8mm)，可滿足不同洗滌需求
- 具有自動預脫水功能(100RPM)，極大地節省人力並顯著地提高生產效率

選購件：

自動入藥水系統-100L
NS-2291藥水配量缸
電控氣動入水系統(工作溫度：-20~80℃)
NS-2500-260工業脫水機
間接保溫系統-內部
另增氣動排水系統 - Ø8"


- Large aperture inner drum, especially suitable for stone wash and enzyme wash of thick garment such as jeans, casual wear.
- Front loading structure, lower liquor ratio, in conjunction with variable frequency speed control to meet various washing requirements with reduced cost
- Tilttable machine body for automatic garment unloading
- Adopt PLC and user friendly touch screen for operation; capable of memorizing 20 sets of programs, with up to 30 steps per program
- Adopt steam direct heating; with real time or preset temperature timing modes for selection
- Equipped with one set of electric controlled pneumatic water feeding system in conjunction with flowmeter for accurate liquor ratio control and easy operation (additionally another one set of electric controlled pneumatic water feeding system can be purchased)
- With manual chemical feeding system (30L)
- SUS 304 stainless steel inner drum (aperture Ø8mm) to cater for various washing requirements
- With automatic pre-spinning function (100RPM), labor cost effective and high efficiency

Optional Accessories:

Automatic chemical feeding system-100L
NS-2291 Chemical Dosing Tank
Electric controlled pneumatic water feeding system (working temperature: -20~80℃)
NS-2500-260 Industrial Extractor
Indirect insulation system-Internal
Pneumatic drainage system - Ø8"



單排水系統
Single drainage system

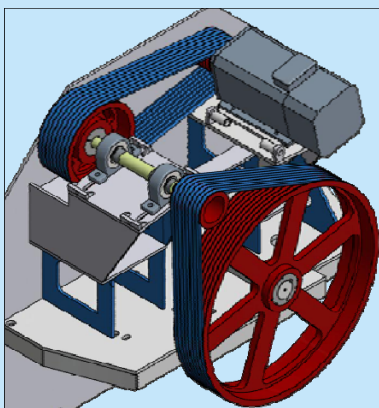

兩級皮帶傳動
Two-stage belt transmission



可傾斜卸料系統
Tiltable unloading system

選購件 Optional Accessories:


二選一 Alternative



O-I-21-02-100
自動入藥水系統-100L
Automatic Chemical Feeding
System-100L




NS-2291
藥水配量缸
Chemical Dosing Tank

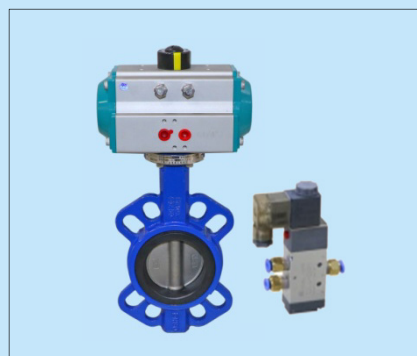

O-I-04-3-1 電控氣動入水系統 - Ø3"
Electric Controlled Pneumatic Water
Feeding System - Ø3"



NS-2500-260
工業脫水機
Industrial Extractor

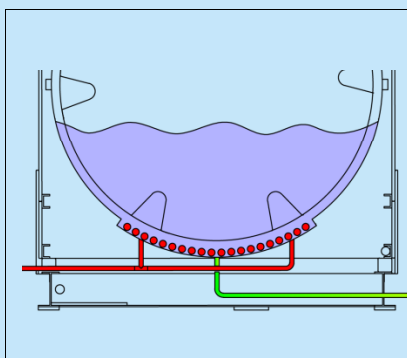

O-I-63-07
間接保溫系統-內部
Indirect insulation system-Internal



O-I-82-01另增氣動排水系統 - Ø8"
Pneumatic drainage system - Ø8"

型號 Model	容量(kg) Capacity	內膽容積(m³) Inner Drum Volume	電源 Power Supply	內膽馬達功率(kW) Inner Drum Motor Power	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	脫水速度(RPM) Extracting Speed	洗滌速度(RPM) Washing Speed	機身尺寸(mm) Machine Size
Wassar 410L	410	4.1	3PH/380V/50Hz	22	Ø1900×1450×4	Ø1990×1715×3	100	12~38	3100×3010×2520*



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com