


NS-6083J

自動襯衫筒縫紉機連收料架

Automatic Shirt Placket Sewing Machine with Stacker



	2	3800RPM	DBx1 #12	

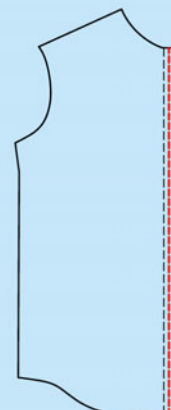

- 適用自動車縫襯衫筒 (裁片需要用NS-5502摺熨)
- 採用PLC可編程控制器控制及人性化觸摸顯示屏操作
- 採用數碼調節襯衫筒間線邊距，可滿足不同規格間線需求且操作方便
- 採用數碼同步拖輪(Ø35x17mm)，提高車縫品質
- 採用真空吸附和吹風動作，配合裁片傍位，使車縫品質更統一
- 採用電眼感應自動車縫配合自動收料，提高工作效率
- 整個車縫工序均自動化，適合生手工人工操作
- 產量：360件/小時(轉速：3800RPM，針距：14針/寸)

跟機件：

縫紉機(JUKI DDL-9000C-SMS)

- Suitable for automatic sewing of shirt placket (cut piece requires folding and ironing by NS-5502 in advance)
- Adopt PLC and user-friendly touch screen for operation
- With digitally adjustable topstitch margin of placket to cater for different specifications of topstitching and enable operation with ease
- Adopt digital synchronous pulley (Ø35x17mm) to improve sewing quality
- Adopt vacuum positioning & air blowing in coordination with cut piece guide system to ensure uniform sewing quality
- Automatic sewing process with electric eye sensor, in conjunction with automatic collecting system to boost efficiency
- Fully automated sewing process, enabling even unskilled workers to operate with ease
- Output: 360 pcs/hour (speed: 3800RPM, stitch length: 14 needles/inch)

Standard Accessories:

Sewing machine(JUKI DDL-9000C-SMS)

型號 Model	電源 Power Supply	總功率(kW) Total Power	間線距離(mm) Topstitch Margin	最大裁片(mm) Maximum Sized Cut Piece	最多收料件數(pcs.) Max.Collecting QTY	壓縮空氣壓力(kgf/cm²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-6083J	1PH/220V/50Hz	1.2	1~60	870x440	40~50	5	42.5	1400x1120x1550



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下

G/F., 52 Wing Hong St.,

Cheung Sha Wan, Kln., Hong Kong.

Tel : (852) 2741 9981, 2742 0078

Fax: (852) 2785 3149

E-MAIL: info@ngaishing.com

Http://www.ngaishing.com