



NS-6047J-1

半自動包襯衫袖口收料架

Semi-Automatic Shirt Cuff Hemming Stacker



	2	3500RPM	DBx1 #11	

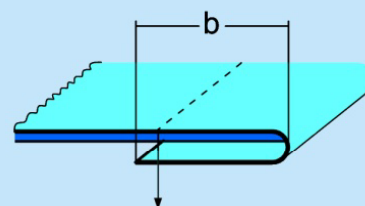

- 適用於已有粘合的袖口襖包縫
- 配合“F253-AB包袖口襖蝴蝶-加吹風”使用，并加裝收料架，可自動疊放袖口，整齊美觀且效率高
- 裁片放入蝴蝶後，機器自動執行車縫和收料，適合生工人操作

跟機件：

縫紉機(JUKI DDL-8000A-SMS)
F253-AB 包袖口襖蝴蝶-加吹風
P701 1/4" 右傍間線壓腳(標準)

選購件：

縫紉機(JUKI DLN-9010A-SS)


- Suitable for hemming cuff with fused interlining
- Used in combination with “F253-AB Cuff Interlining Attachment with Air Blowing” and material collector, it can automatically and efficiently stack cuffs in good order
- After cut piece feeding into attachment, machine will automatically perform sewing and collecting; therefore, even unskilled worker can handle it at ease

Standard Accessories :


Sewing machine(JUKI DDL-8000A-SMS)
F253-AB Cuff Interlining Attachment with Air Blowing
P701 1/4" Right Compensated Presser Foot (Standard)

Optional Accessories :


Sewing machine(JUKI DLN-9010A-SS)

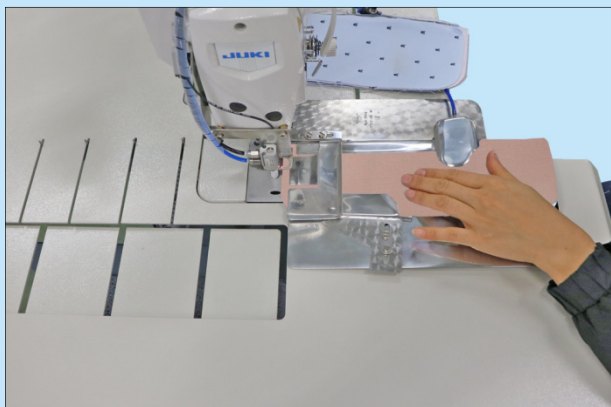


開始縫紉 Start sewing

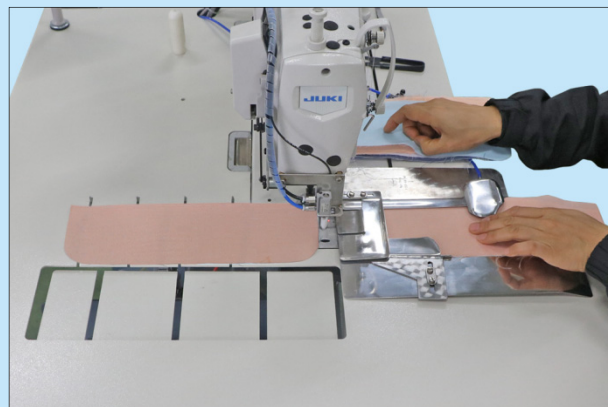

第一裁片縫紉結束 First piece finished

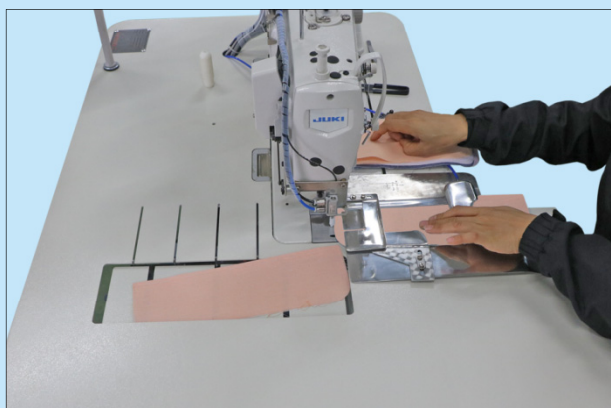


收料 Collecting

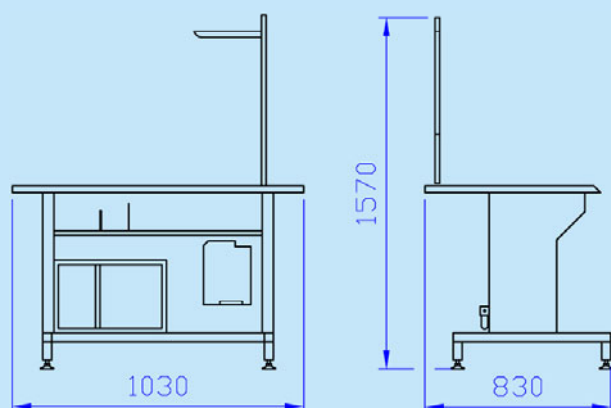

機身尺寸 Machine size

針距 Stitch Length(mm):	1.7
車速 Speed(RPM):	3500
袖口長度 Cuff Length(mm):	290
產量 Output(pair/hr):	450對/小時

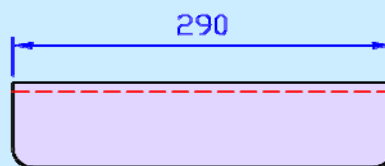

袖口長度 Cuff Length(mm)

型號 Model	適用衣車頭機型 Applicable Sewing Machine Head Model	電源 Power Supply	總功率(kW) Total Power	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-6047J-1	JUKI DDL-8000A	1PH/220V/50Hz	0.55	5	51.6	1030x830x1570



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com