


NS-9502

自動轉頭側縫壓平機

Automatic Rotation Side Seam Press

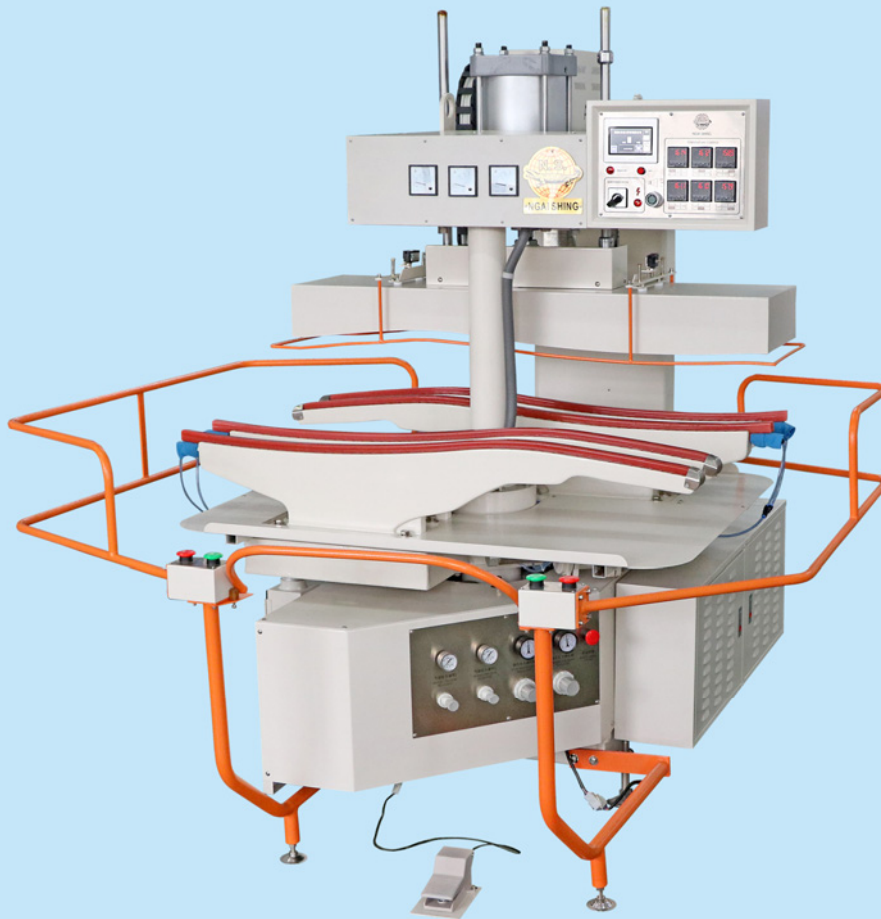

- 適用於襯衫側縫粘合壓熨
- 採用PLC可編程控制器控制及人性化觸摸顯示屏操作
- 自動旋轉式雙下模設計，操作方便、工作效率高
- 輕壓、重壓兩種壓熨方式供選擇設定，可滿足不同面料需求
- 上模加熱採用六個獨立數字式溫度控制器控制，溫度控制更精確
- 單發熱上模配合雙下模交替操作，電能利用率高
- 下模氣袋配合耐壓的高溫硅膠條，可消除側縫壓熨時側縫與袖山底骨位的厚薄偏差，達到最佳壓熨效果
- 獨立真空抽濕泵，有助衣物定位、冷卻，定型效果佳
- 備有不同的側縫模，可來樣測試選擇合適的一款跟機模


選購件：

O-J-01-3 吹風冷卻系統(壓縮空氣)
各種側縫模(B款、C款、D款)

- Suitable for shirt side seam fusing and pressing
- Adopt PLC and user friendly touch screen for operation
- Dual automatic rotation lower moulds enables easy operation and high efficiency
- Two pressing modes, i.e. light press and heavy press, are available for selection to cater for different fabrics
- Upper mould with six independent digital thermostats for accurate temperature control
- Single heating upper mould works alternatively with two lower moulds, high electric energy utilization rate
- Lower mould airbag combined with pressure-proof high temperature silica rubber, can offset the thickness difference between side seam and under armhole seam, thereby to achieve perfect pressing effect
- With independent vacuum pump to facilitate garment fixing, cooling and shaping
- Different side seam moulds available for sample test and select one of them as standard


Optional Accessories :

O-J-01-3 Compressed air blowing cool down system
Various side seam moulds(type B, C, D)

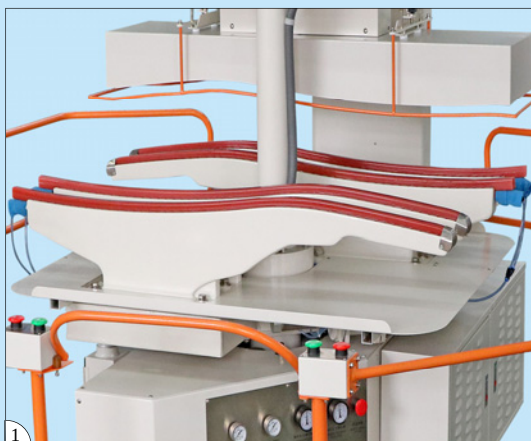

1. 高質硅膠及氣袋，自動充氣
2. 雙模操作，可同時鋪料和壓熨
3. 獨立抽濕系統，輔助下模定位
4. PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作

1. High quality silica rubber and air bag for automatic air charging
2. Double moulds operation; fabric placement and pressing can be performed at the same time
3. Independent vacuuming system to facilitate positioning of lower mould
4. Adopt PLC and human friendly touch screen for operation

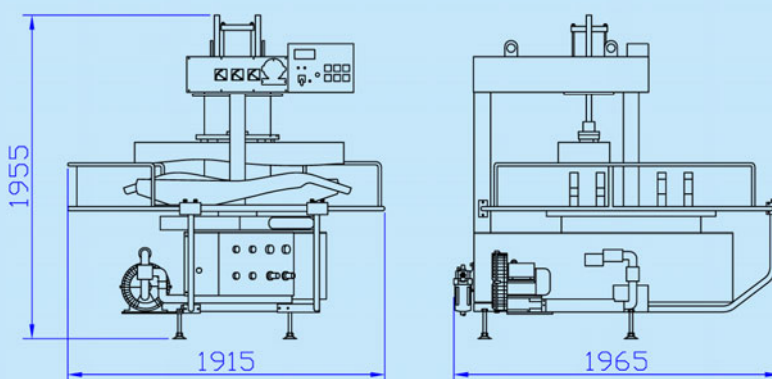


型號 Model	電源 Power Supply	總功率(kW) Total Power	發熱線功率(kW) Heater Power	真空泵功率(kW) Vacuum Pump Power	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	平均粘合壓力(kgf/cm ²) Average Fusing Pressure	淨重(kg) Net Weight	機身尺寸(mm) Machine Size
NS-9502	3PH/380V/50Hz	5.6	4	1.5	5	286.4	2.5	948	1915x1965x1955



藝誠(余氏)發展有限公司
Ngai Shing Development Limited


香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com

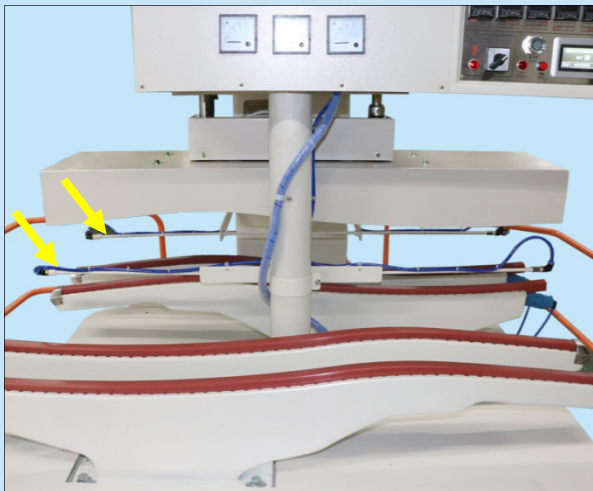

選購件: O-J-01-3 吹風冷卻系統(壓縮空氣)

Optional Accessories : O-J-01-3 Compressed air blowing cool down system

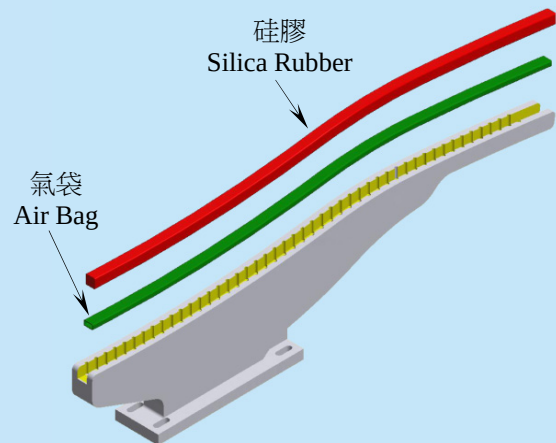


特別設計下模，可消除側縫壓熨時側縫與袖山底骨位間的厚薄偏差
Special design for the lower mould to offset the thickness difference between side seam and under armhole seam

選購件 (每款模包括一對上模和兩對下模)


Optional Accessories (Each type consists of one pair of upper moulds and two pairs of lower moulds)



B款下模
Lower mould Type B
編號：M05040302B-B

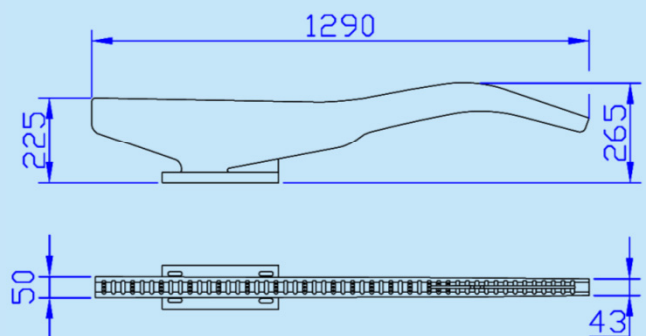

C款下模 (標準跟機模)
Lower mould Type C (Standard)
編號：M05040303C-C

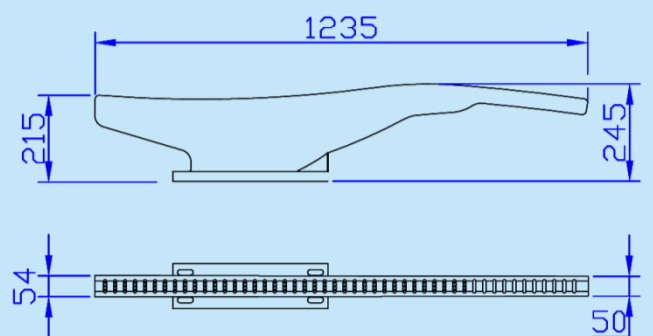

D款下模
Lower mould Type D
編號：M05040304D-D

