


NS-9501

自動轉頭袖山縫壓平機

Automatic Rotation Armhole Press



- 適用於襯衫袖山縫粘合壓熨
- 採用PLC可編程控制器控制及人性化觸摸顯示屏操作
- 自動旋轉式雙下模設計，操作方便，工作效率高
- 輕壓、重壓兩種壓熨方式供選擇設定，可滿足不同面料需求
- 上模加熱採用三個獨立數字式溫度控制器控制，溫度控制更精確
- 單發熱上模配合雙下模交替操作，電能利用率高
- 下模氣袋配合耐壓的高溫硅膠條，可消除袖山縫壓熨時袖山縫與後擔桿骨位的厚薄偏差，達到最佳壓熨效果
- 獨立真空抽濕泵，有助衣物定位，冷卻、定型效果佳
- 備有不同的袖山縫模，可來樣測試選擇合適的一款跟機模


選購件：

O-J-01-2 吹風冷卻系統(壓縮空氣)
各種袖山模(A款~K款)

- Suitable for shirt armhole fusing and ironing
- Adopt PLC and user friendly touch screen for operation
- Automatic rotary dual lower moulds, easy to operate and significantly improve production efficiency
- Two pressing modes (light press and heavy press) are available for selection to cater for different fabric
- Apply three independent digital thermostats for accurate temperature control of the upper mould
- One upper heating mould works alternately with two lower moulds, for high electricity utilization rate
- Lower mould airbag combined with pressure-proof high temperature silica rubber, can offset the thickness difference between armhole and back yoke seam, thereby to achieve perfect pressing effect
- Independent vacuum pump facilitates garment positioning, cooling and shaping
- Different armhole moulds available for sample test and select one of them as standard

Optional Accessories:


O-J-01-2 Compressed air blowing cool down system
Various armhole moulds(type A~K)

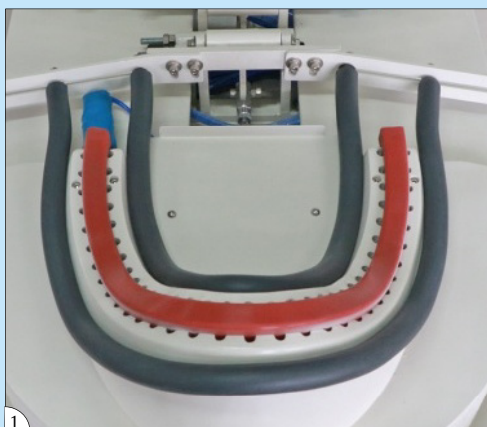

選購件Optional Accessories:
O-J-01-2 吹風冷卻系統(壓縮空氣) Compressed air blowing cool down system

1. 高質硅膠及氣袋，自動充氣
2. 雙模操作，可同時鋪料和壓熨
3. 獨立抽濕系統，輔助下模定位
4. PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作

1. High quality silica rubber and air bag for automatic air charging
2. Double moulds perform alternatively , placing fabric and pressing are available at the same time
3. Independent vacuuming system to facilitate positioning of lower mould
4. Adopt PLC and human friendly touch screen for operation

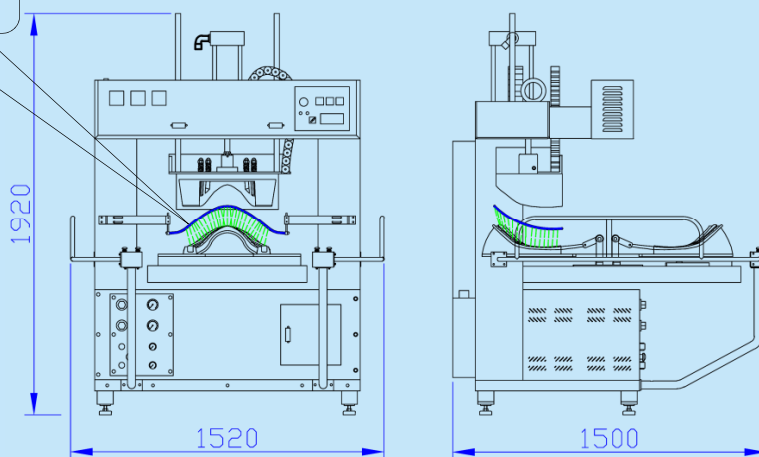

型 號 Model	電 源 Power Supply	總功率 (kW) Total Power	發熱線功率 (kW) Heater Power	真空泵功率(kW) Vacuum Pump Power	壓縮空氣壓力 (kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量 (L/min) Compressed Air Consumption	平均粘合壓力 (kgf/cm ²) Average Fusing Pressure	淨重(kg) Net Weight	機身尺寸 (mm) Machine Size
NS-9501	3PH/380V/50Hz	4	2.4	1.5	5	167.6	2.5	846	1520x1500x1920



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.


Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com

選購件 (每款模包括一個上模和兩個下模)



Optional Accessories (Each type consists of one upper mould and two lower moulds)





A款下模
Lower mould Type A
編號：M13050101-A-1

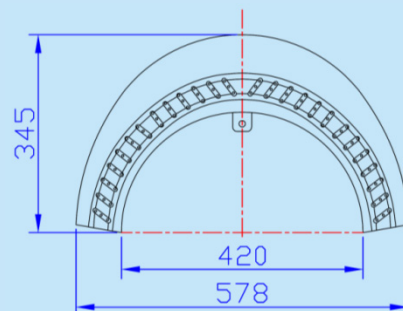


B款下模
Lower mould Type B
編號：M13050102-B-1

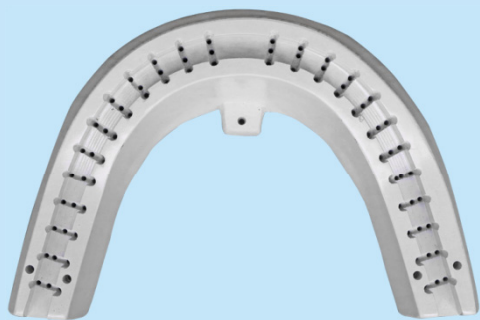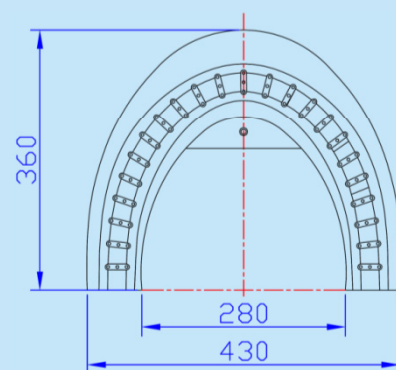

C款下模 (標準跟機模)
Lower mould Type C
(Standard)
編號：M13050103-C-1

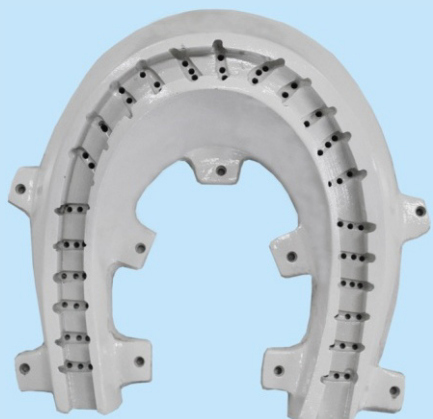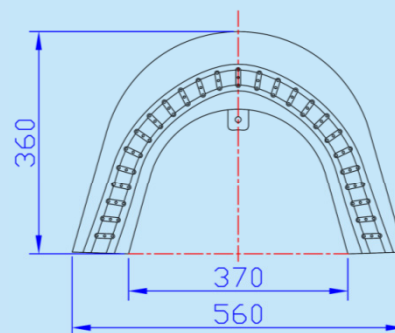


D款下模
Lower mould Type D
編號：M13050104-D

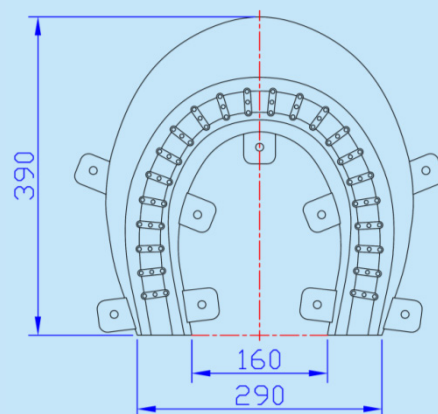





E款下模
Lower mould Type E
編號：M13050105-E

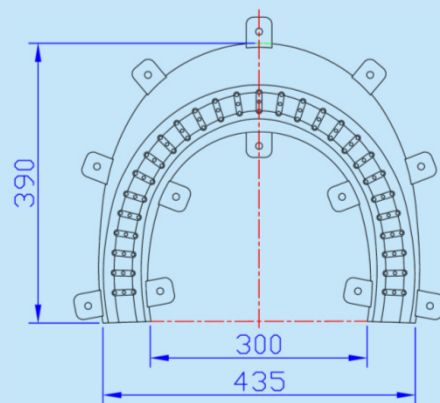

G款下模
Lower mould Type G
編號：M13050107-G-1

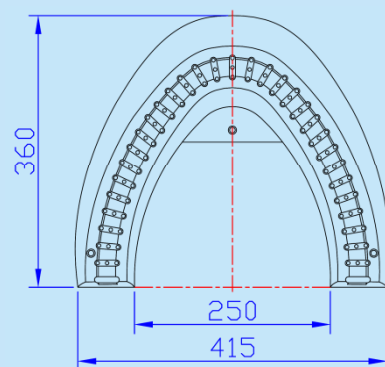

J款下模
Lower mould Type J
編號：M13050109-J

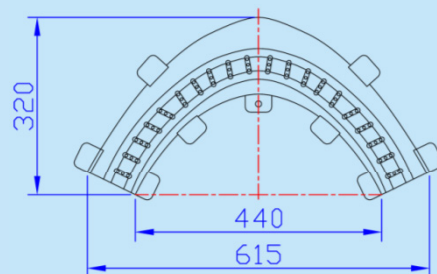

K款下模
Lower mould Type K
編號：M13050110-K

