

Farbe 360L
自動洗衣染色機
Automatic Washing & Dyeing Machine



- 適用于對活性染料和亞蘇特Asutex染料的成衣染色以及對牛仔，休閒服等成衣進行石洗、酵洗
- 採用PLC可編程控制器控制及人性化操作界面觸摸顯示屏操作，可記憶20組洗衣程式，每組程式可設置30個步驟
- 專利撥水式內膽，無泵水循環，實現超低水比染色，節約用水及染料
- 獨特間接加熱方式，不佔用儲水空間，可有效減少水比，升溫速度快
- SUS 316不鏽鋼內膽(內膽孔徑Ø8mm)，可滿足不同染色需求
- SUS 316不鏽鋼藥水泵，經久耐用
- 備有多規格染色缸(200L x1個，15Lx3個)，方便不同染色需求
- 標配1套自動氣動入水系統，配合流量計控制，使內膽水比控制更準確且操作方便(另可選購一套自動氣動入水系統)
- 機身可傾斜，自動卸料，減少人力
- 具有自動預脫水功能(100RPM)，極大地節省人力並顯著地提高生產效率

選購件：

自動氣動入水系統


- Suitable for garment dyeing with reactive dye and Asutex dye, for stone wash and enzyme wash of jeans, casual wear, and other kinds of garments
- Adopt PLC and user friendly touch screen for operation; which can memorize 20 sets of programs, with up to 30 steps per program setting
- Patented bail type inner drum with pump-free water circulation, enabling ultra-low liquor ratio dyeing, with minimal consumption of water and dyes
- Unique indirect heating mode, which does not occupy water storage space, effectively lowering liquor ratio and with fast heating speed
- SUS 316 stainless steel inner drum (aperture Ø8mm) to cater for various dyeing requirements
- SUS 316 stainless steel chemical pump, durable and long-lasting
- Equipped with dosing tanks of different capacities (200L x1Pc, 15Lx3pcs) to cater for various dyeing requirements
- With one set of automatic pneumatic water feeding system plus flowmeter for accurate water ratio control and easy operation(another set of automatic pneumatic water feeding system can also be mounted as an option)
- Machine body can tilt to allow for automatic unloading to save manpower
- With automatic spin-dry function (100RPM), which is labor cost effective and significantly boosting production efficiency

Optional Accessories:

Automatic pneumatic water feeding system




入水流量計
Water Inlet Flowmeter

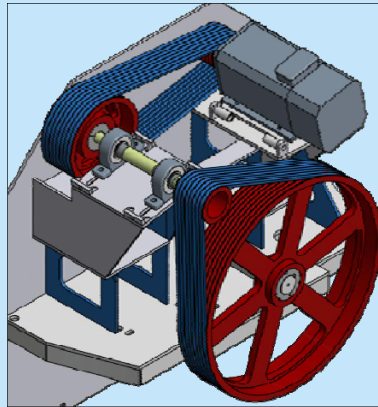

兩級皮帶傳動
Two-stage belt transmission




可傾斜卸料系統
Tiltable unloading system

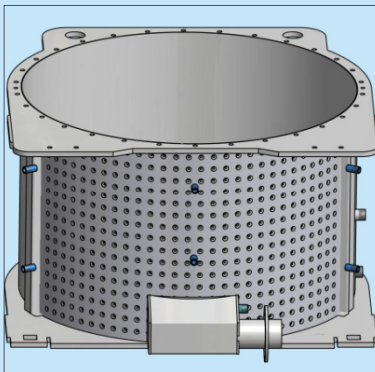

SUS 304外殼間接保溫系統
SUS 304 Shell indirect
insulation system



專利撥水式內膽，無泵水循環，實現超低水比染色，節約用水及染料
Patented bail type inner drum and pump-free water circulation enable ultra
low liquor ratio dyeing process, with minimal consumption of water and dyes

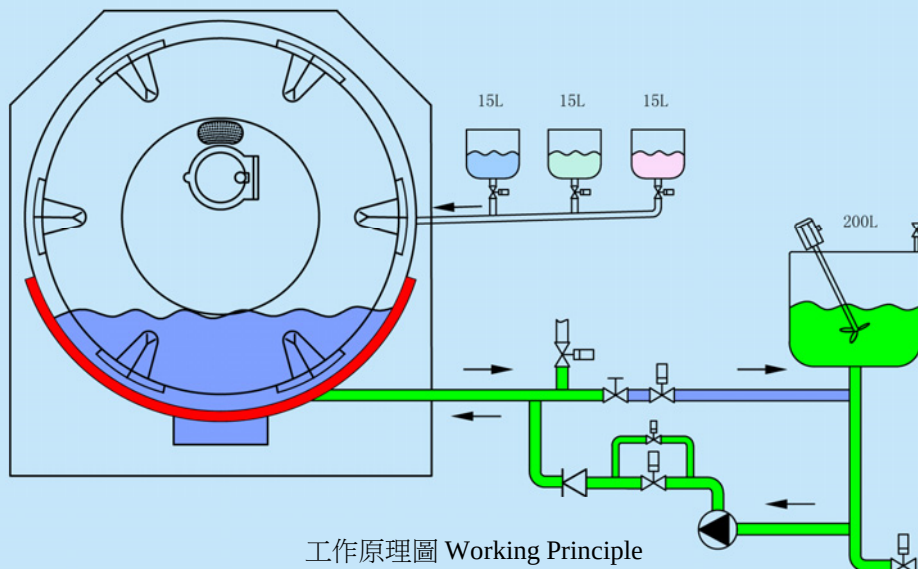

型號 Model	容量(kg) Capacity	內膽容積(m³) Inner Drum Volume	電源 Power Supply	內膽馬達功率(kw) Inner Drum Motor Power	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	內外膽間距(mm) Spacing between Inner and Outer Drums	洗水轉速 (RPM) Washing Speed	脫水速度(RPM) Extracting Speed
Farbe 360L	360	3.6	3PH/380V/50Hz	22	Ø1804x1450x3	Ø1980x1716x3	42	12~38	100



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com