

NS-9082-N 四邊摺袋蓋機-單頭
Pocket Flap Creasing Machine - Single Head
NS-9082-ND 四邊摺袋蓋機-雙頭
Pocket Flap Creasing Machine - Double Head



NS-9082-N



- 適用於全棉、牛仔、針織布料摺袋蓋(袋蓋裁片為1片成型，底面相連)
- 採用PLC可編程控制器控制及人性化觸摸顯示屏操作
- 特別設計袋蓋模，可四邊摺合及壓出中線，然後把摺好的布料對摺形成袋蓋
- 採用電加熱及獨立數字溫度控制器控制溫度，確保最佳摺袋蓋效果
- 生產效率高，NS-9082-N每小時摺袋蓋約360塊
- 最少止口 $\frac{3}{8}$ "

跟機件：

客戶需提供來樣(紙樣+布料)定造模具，如果沒有來樣，則安裝標準模

選購件：

三尖袋蓋模
六角袋蓋模
圓角袋蓋模
四方袋蓋模

- Suitable for pocket flap creasing of full cotton, denim, knit fabrics (The cut piece is formed in one piece, symmetrically folded by the centerline)
- Adopt PLC and user friendly touch screen for operation
- With specially designed pocket flap mould to enable all sides and center line to be creased to form a pocket flap
- Adopt electric heating and independent digital thermostat for temperature control, ensuring the best creasing effect
- High output with 360 pcs of pocket flaps per hour by NS-9082-N
- Minimum margin of $\frac{3}{8}$ "

Standard Accessories:


The customer needs to provide samples (paper sample + fabric sample) for mould customization. In case no samples provided, standard mould will be installed.

Optional Accessories:

Triangular bottomed pocket flap mould
Hexagonal bottomed pocket flap mould
Round bottomed pocket flap mould
Square bottomed pocket flap mould



將袋布放在發熱板上
Place material on heating platform


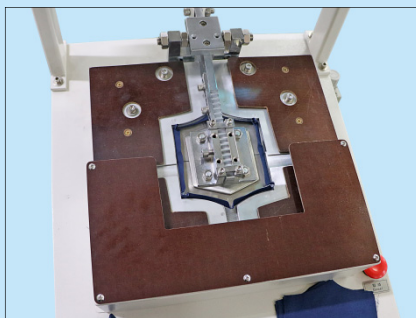


袋蓋模四邊同時摺熨
Pocket flap mould creases all sides



袋蓋摺熨完成
Pocket flap creasing finished

機型 Model	跟機件 Standard Accessories	選購件Optional Accessories			
NS-9082-N NS-9082-ND	 M22060901 三尖袋蓋模 Triangular Bottomed Pocket Flap Template	 M22060903 來樣三尖袋蓋模 Customized Triangular Bottomed Pocket Flap Template	 M22060701 來樣六角袋蓋模 Customized Hexagonal Bottomed Pocket Flap Template	 M22060801 來樣圓角袋蓋模 Customized Round Bottomed Pocket Flap Template	 M22061001 來樣四方袋蓋模 Customized Square Bottomed Pocket Flap Template

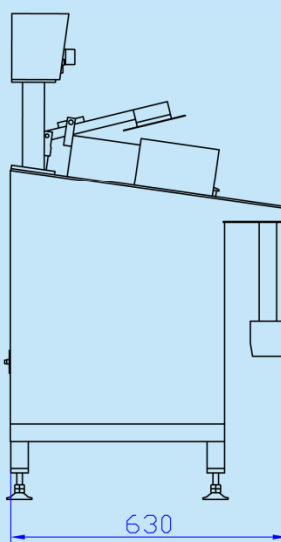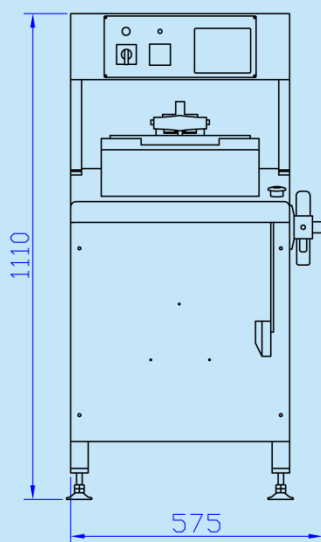

NS-9082-N
機身外形尺寸圖
Machine external
dimensions diagram

型號 Model	電源 Power Supply	總功率(kW) Total Power	摺袋蓋尺寸(inch) Pocket flap sizes	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption
NS-9082-N	1PH/220V/50Hz	1	Min. 3 3/4 × 4, Max. 6 1/4 × 8	4~5	15
NS-9082-ND		2			30



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com