

NS-2701A-100
工業洗衣機
Industrial Washing Machine



- 適用於各種梭織、針織、牛仔衣物的普洗、酵洗、套色
- 採用三級皮帶傳動，增加轉動扭矩
- SUS 304不鏽鋼內外膽，內膽可定時正、逆轉動
- 自動洗衣時間及到溫計時與即時計時方式選擇
- 超小內外膽間隙，節約用水，單邊間隙33mm
- 配備數字式溫度控制器控制，溫度控制更精確
- 採用蒸汽直接加溫與間接加溫相結合



選購件：

蒸汽(直接/間接加溫)氣動閥總成
疏水閥總成
手控氣動入水系統
手動改氣動排水控制系統
速度控制系統
手動入藥水盒系統

- Suitable for garment wash, enzyme wash and tinting of garments of various fabrics such as woven, knit fabrics, denim, etc.
- 3-stage belt drive to increase torque
- SUS 304 stainless steel inner and outer drums, inner drum can rotate forward and backward according to preset time
- Automatic washing time control; up-to-temperature and immediate timing modes available for selection
- Ultra narrow gap between inner and outer drum, single side 33mm, thus save water consumption
- Equipped with digital temperature controller for accurate temperature control
- Combination of direct and indirect steam heating




Optional Accessories :

Steam (Direct/Indirect Heating) Pneumatic Valve Assy
Steam Trap Set
Manual Controlled Pneumatic Water Feeding System
Manual to Pneumatic Water Draining Control System
Speed Control System
Manual Chemical Feeding System

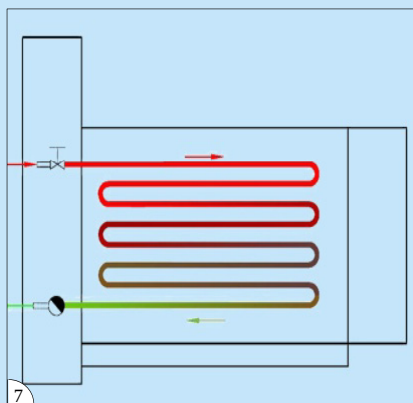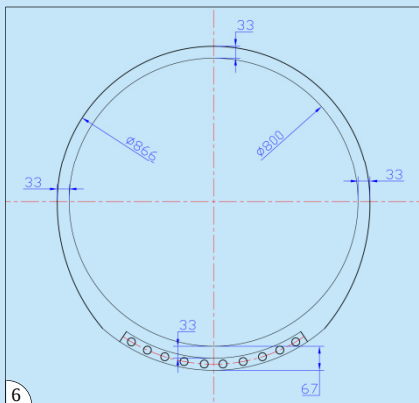

序號 No.	說明 Description
1	直接加溫裝置 Direct steam heating device
2	手推式外門 Manual slide door
3	三級皮帶傳動 3-stage pulley belt drive
4	水位尺(有刻度) Water level glass with scale
5	手動排水裝置 Manual water discharge device
6	內外膽尺寸示意圖 Size diagram of inner and outer drums
7	蒸汽間接加溫示意圖 Indirect steam heating diagram
8	間接加溫管裝置 Indirect heating device

選購件Optional Accessories :

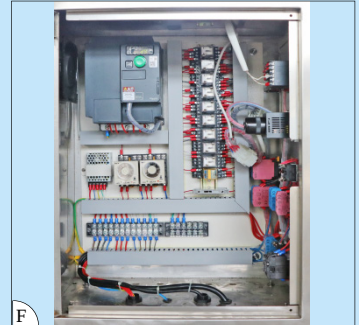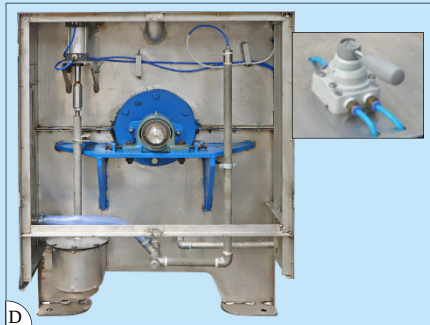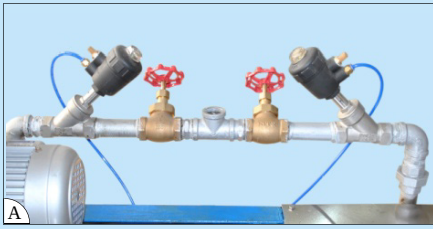

序號 Serial No.	編號 Part No.	中英文名稱 Description
A	O-I-01-5	蒸汽(直接/間接加溫)氣動閥總成-Ø1" Steam (Direct/Indirect Heating) Pneumatic Valve Assy-Ø1"
B	O-I-03-3	疏水閥總成-Ø1/2" Steam Trap Set-Ø1/2"
C	O-I-04-4	手控氣動入水系統-Ø1 1/2" Manual Controlled Pneumatic Water Feeding System-Ø1 1/2"
D	O-I-07-2	手動改氣動排水控制系統-Ø6" Manual to Pneumatic Water Draining Control System-Ø6"
E	O-I-53-01	手動入藥水盒系統 Manual Chemical Feeding System
F	O-I-10-2	速度控制器系統 2.2kW Speed Control System 2.2kW

型號 Model	容量 (LBS) Capacity	電源 Power Supply	馬達 (kW) Motor	耗蒸汽量(kg/hr) Steam Consumption	內膽尺寸(mm) Inner Drum Size	外膽尺寸(mm) Outer Drum Size	入水口Water Inlet(inch)	出水口Water Outlet(inch)	洗衣速度 (RPM) Washing Speed	機身尺寸(mm) Machine Size
NS-2701A-100	100	3PH/380V/50Hz	2.2	60	Ø800×990×2	Ø866×1100×1.5	Ø2" ×1pc	Ø6" ×1pc	30~33	1710×1290×1650



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com