


NS-6068J-A-1

自動襯衫免燙貼袋機

Automatic Shirt Pocket Folding and Setting Machine



	 2	 3000RPM	 DBx1 #11	
---	--	--	---	---

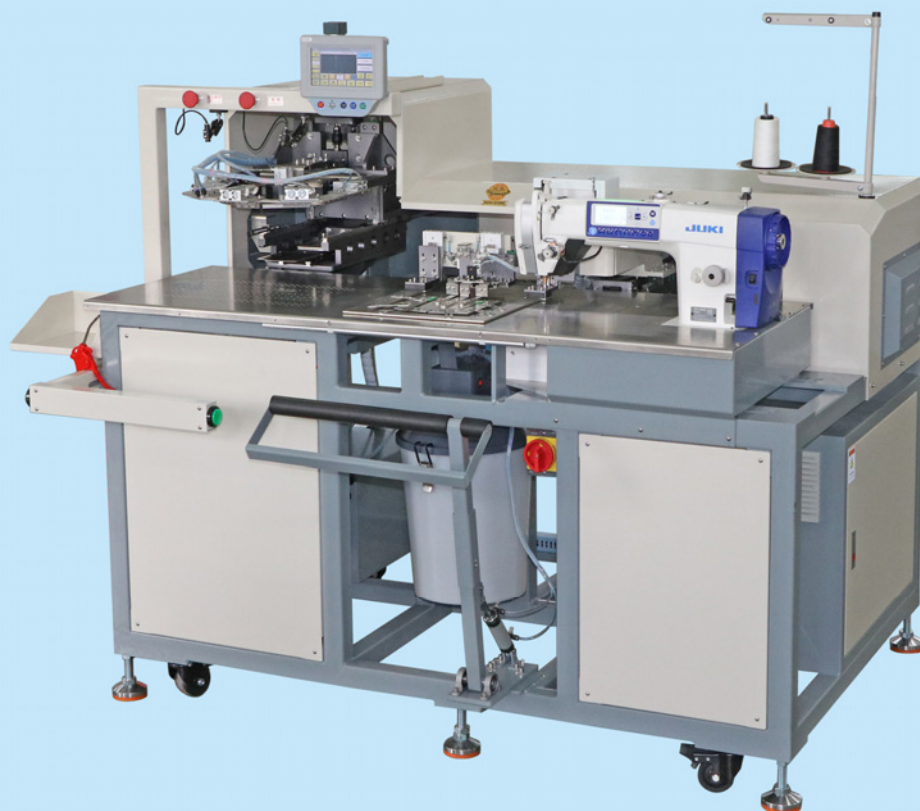

- 適用於自動縫製襯衫、針織貼袋，先自動摺疊口袋，然後自動縫製並收料
- 採用單片微處理器控制及人性化觸摸顯示屏操作，操作方便快捷
- 雙工位設計，可同時擺料與車縫，提高工作效率
- 車縫工序自動化，適合非熟練工人操作，每小時可完成285個口袋(2500RPM，15針/寸)

跟機件：

縫紉機(JUKI DDL-8000A)

圓角袋模(需提供規格)

選購件：

各種規格線跡三尖袋模、四方袋模、圓角袋模

- Suitable for automatic shirt/knitwear pocket folding, setting and collecting
- Adopt single chip microprocessor and user friendly touch screen for fast and easy operation
- Dual-station design enables loading and sewing to be performed simultaneously to boost efficiency
- The automatic sewing process enables even unskilled operator to handle with output of 285 pcs of pockets per hour (2500RPM, 15 Needle/inch)




Standard Accessories:

Sewing machine(JUKI DDL-8000A)


Round-corner bottomed pocket template(customer to provide specifications)

Optional Accessories:


Triangular/square/round-corner bottomed pocket templates of various specifications

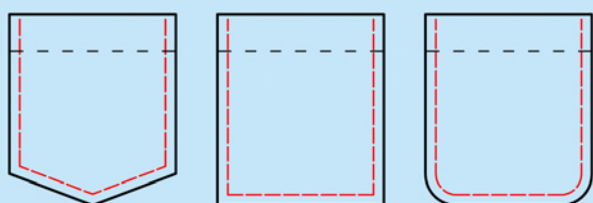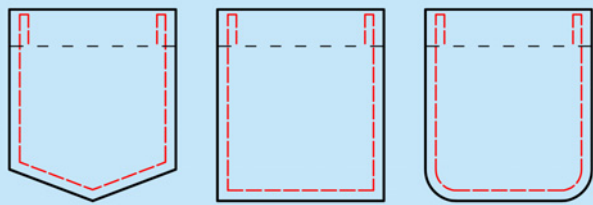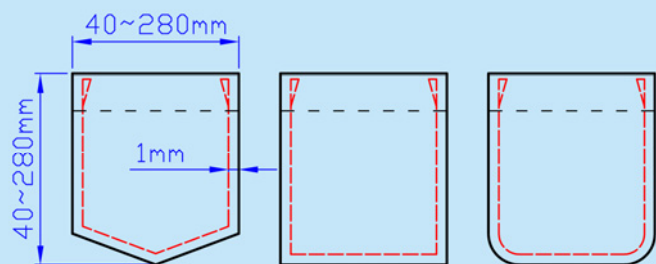


標準選購件
Standard Options

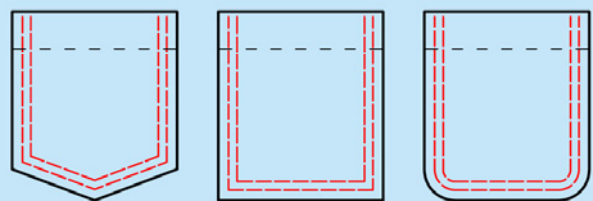


來樣特造選購件
Customized Options



摺邊止口尺寸圖
Folded Margin Dimensions

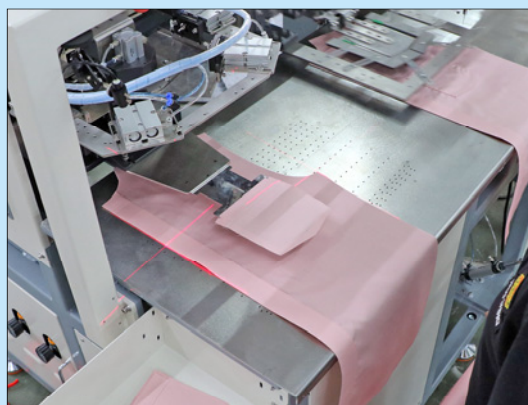

1.擺放口袋裁片(免燙)
Laying the cut piece of pocket(iron-free)

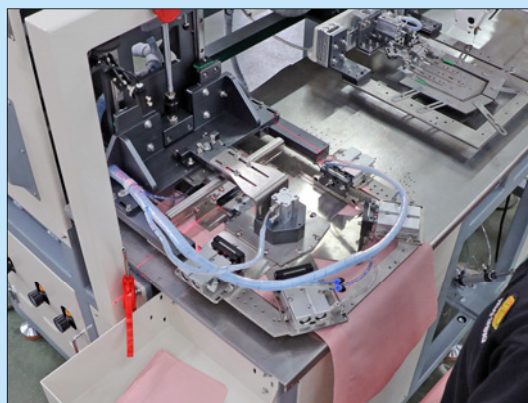

2.機器自動折袋
Automatic pocket folding by machine



3.機器自動貼袋車縫及收料
Automatic pocket setting and collecting

型號 Model	適用衣車頭機型 Applicable Sewing Head Model	電源 Power Supply	總功率 (kW) Total Power	車縫至袋邊距離 (mm) Stitch-Edge Distance	摺邊止口(mm) Folded Margin	針距長度 (mm) Stitch Length	最小車縫尺寸 (mm) Min. Sewing Size	最大車縫尺寸 (mm) Max. Sewing Size	壓縮空氣壓力 (kgf/cm ²) Compressed Air Pressure	機身尺寸(mm) Machine Size
NS-6068J-A-1	JUKI DDL-8000A	1PH/220V/50Hz	1.5	1	10	0.1~12.7	40x40	280x280	5	1800x1620x1860



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com