


NS-6080J-A

自動運衣領袖口機

Automatic Collar and Cuff Runstitch Machine



2	3000RPM	DPx17 #75, #11		

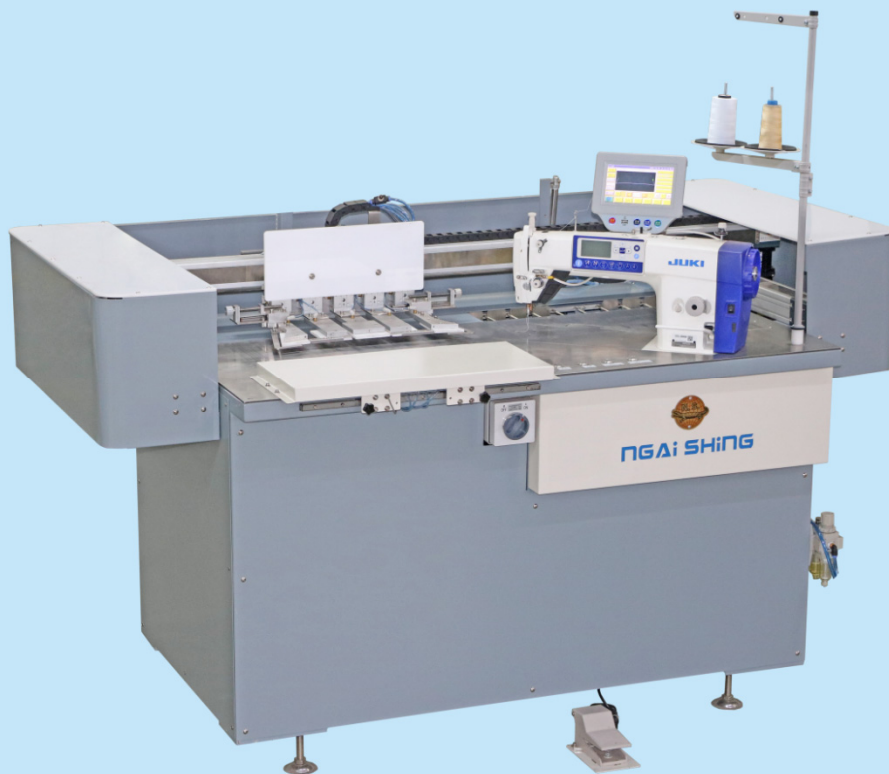

- 適用於自動運普通領、袖口以及立體領、袖口
- 單片微處理器控制及人性化觸摸顯示屏，操作方便快捷
- 採用XY軸運行，可滿足不同尺寸與形狀(需配合相應模具)
- 雙工位設計，可同時鋪料和車縫
- 獨立抽風定型，鋪料操作更方便
- 車縫不同形狀和尺寸領、袖時，需更換相應模具
- 自動收料系統，提高工作效率
- 車縫工序自動化，適合非熟練工人操作
- 裁片預先精準裁切，配合數字化車縫，無需再次切邊操作，可節省布料
- 最少止口 $\frac{3}{16}$ "

跟機件：

縫紉機(JUKI DDL-8000A-SMS)

尖角領模、圓角袖口模

選購件：

各種領模和袖口模(客戶需提供全碼尺寸)

- Suitable for automatic runstitch of ordinary and 3D collar, cuff
- Adopt Single chip microprocessor and user friendly touch screen for easy and fast operation
- Adopt XY axis operation to cater for different sizes and patterns (corresponding template required)
- Twin stations designed for simultaneous operation of feeding and sewing
- Independent vacuum pump for setting, enables easy material feeding
- Template changing required when sewing collar or cuff of different pattern and size
- Automatic collecting system boosted efficiency
- Fully automatic sewing process enables unskilled workers to operate with ease
- Precise fabric piece cutting in advance in coordination with digitalized sewing, eliminates the needs for further trimming, for minimal fabric wastage
- Minimal margin $\frac{3}{16}$ "

Standard Accessories :

Sewing machine (JUKI DDL-8000A-SMS)


Sharp corner collar template

Round corner cuff template


Optional Accessories :

Various collar and cuff templates (Customers to provide size specifications for the templates requested)

NGAI SHING 藝誠

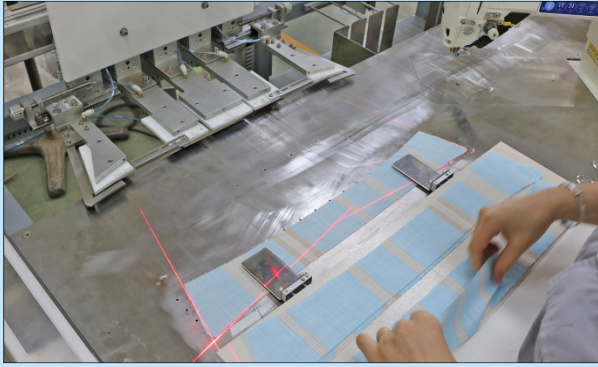

自動運領操作 Automatic collar run-stitch operation

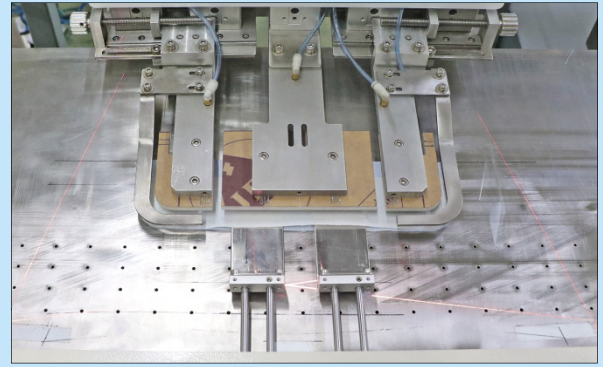

自動運袖口操作 Automatic cuff run-stitch operation




自動收料系統 Automatic collecting system




人性化觸摸顯示屏 User friendly touch screen

跟機模Standard Accessories :

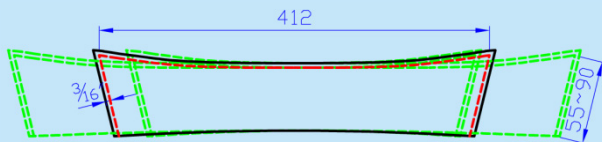


尖角領模
Sharp corner collar template

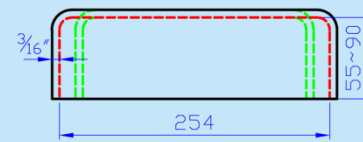

圓角袖口模
Round corner cuff template

選購件Optional Accessories :

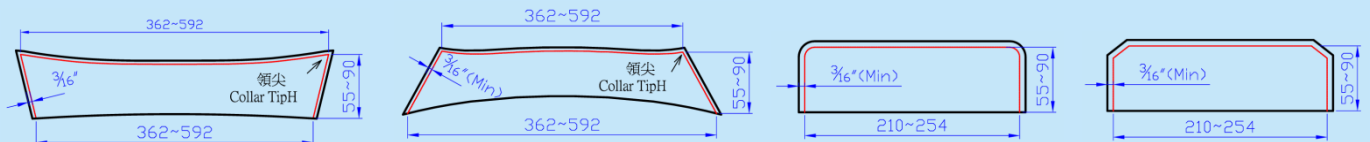

不同形狀和尺寸衣領、袖口模(領模長362~592mm，領模寬55~90mm；袖口模長210~254mm，袖口模寬55~90mm)
Different shaped and sized templates for collar, cuff (collar template length 362~592mm, width 55~90mm; cuff template length 210~254mm, width 55~90mm)

型號 Model	適用衣車頭機型 Applicable Sewing Head Model	電源 Power Supply	總功率(kW) Total Power	針距長度(mm) Stitch Length	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-6080J-A	JUKI DDL-8000A	1PH/220V/50Hz	2.3	1.4~2.5	5	32.5	1900x1080x1620



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F, 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com