
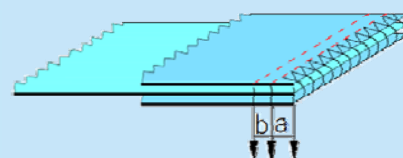




NS-6072

自動擔桿縫紉機

Automatic Yoke Sewing Machine

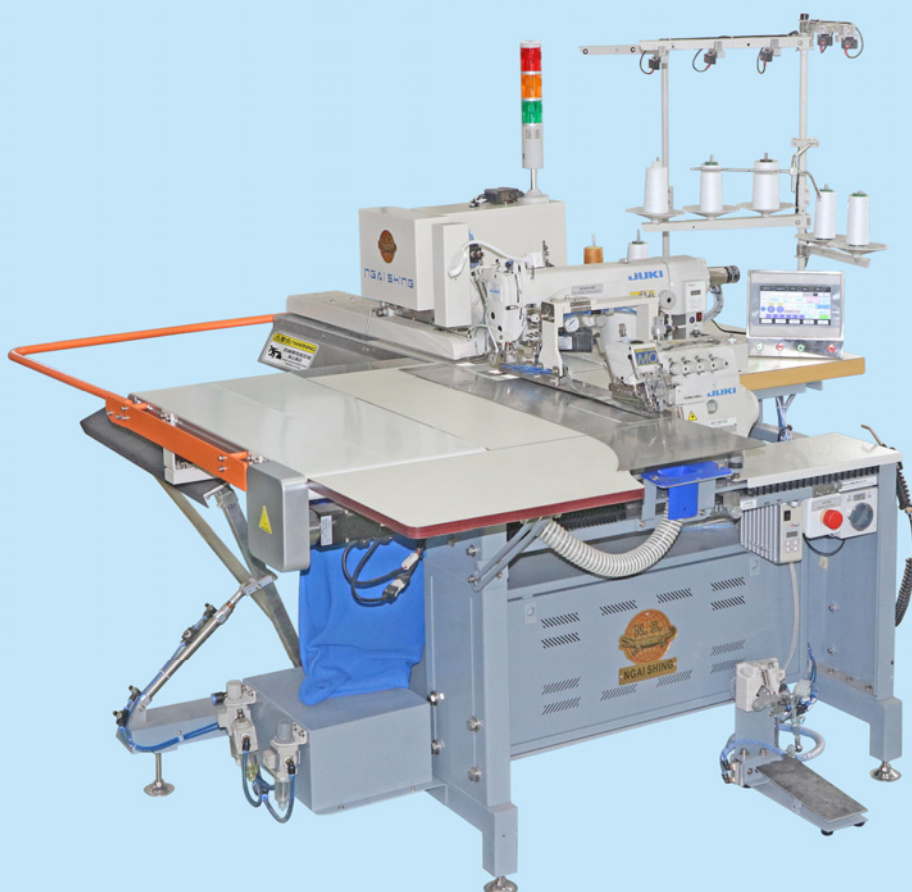


1.五線鉸骨 5-thread overlocking

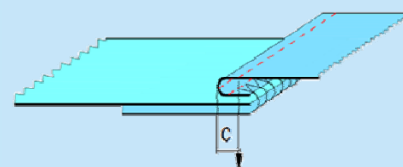

2.平車自動間線(C=1~5mm)
topstitching by lockstitch
machine (C=1~5mm)

- 適用於五線鉸骨配合單針平車自動間線
- 集鉸骨與間線工序二合一並同步完成；操作者只需手勢配合鉸骨，就同時完成了鉸骨與間線二個工序，節省了間線人工和時間成本
- 間線邊距可通過程式控制數碼調節，操作方便
- 撥布輪自動撥布，可根據不同布料，調節不同撥布力度，使間線效果更佳
- 數碼拖輪配合同步輸送帶送布，使車縫品質更佳
- 全自動定位剪線剪刀
- 自動收料，效果整齊美觀
- 縫紉機可數碼調節位移，方便維修操作
- 操作高度可調，適合站立式操作或傳統坐式操作

- Suitable for 5-thread overlocking in conjunction with automatic topstitching by single needle lockstitch machine
- Overlocking and topstitching finished in one step that only requires worker's aid in fabric feeding; which is labor cost effective and of time efficiency
- Topstitch margin can be digitally adjusted through program control
- The force of automatic fabric spreading wheel can be adjusted to cater for different fabrics to obtain optimum topstitch result
- Fabric feeding through digital pulley in conjunction with synchronous conveyor belt for better sewing quality
- Fully automatic positioning thread cutter
- Automatic collecting for tidy effect
- Sewing machine position can be shifted digitally for maintenance convenience
- With adjustable table height so that worker can operate the machine in standing or sitting posture

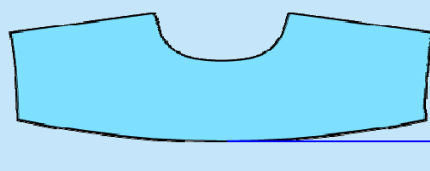


弧度不大於20mm
Curve height not exceeding 20mm



需預先加工刀折位
Knife pleats need to be pre-made


需預先加工工字折位
Inverted pleats need to be pre-made

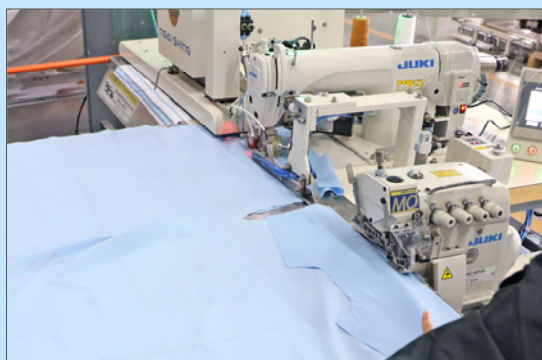

釁骨和間線二合一操作
Integrated process of overlocking and topstitching



自動收料
Automatic stacking

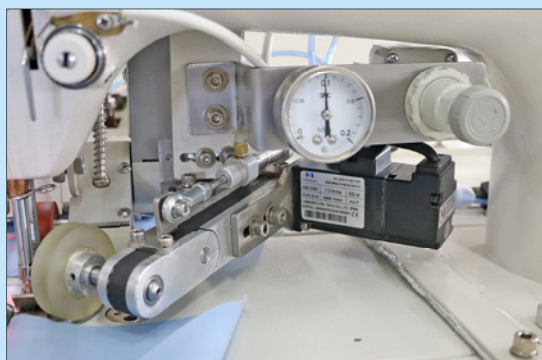

自動撥布裝置
Automatic fabric spreading device



數碼同步拖輪，使車縫品質更佳
Digital synchronous pulley for better sewing quality

型號 Model	電源 Power Supply	總功率(kW) Total Power	數碼調節間線距離(mm) Digital Adjustment of Stitch-Edge Distance	最大收料寬度 (mm) Max. Stacking Width	台面高度調節範圍 (mm) Table Height Range	壓縮空氣壓力 (kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-6072	1PH/220V/50Hz	1.8	1~5	750	850~1100	5	20	1550x2040x1620



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com