



NS-47C

自動工字釘鈕機連送料裝置

Automatic Jeans Button Fixing Machine with Feeder



帽式金屬鈕扣
Hat type metal button



單針鋁鉚釘
Single-pin aluminum rivet



1. 特別設計安全保護裝置，提高操作安全
Specially designed protection device to ensure operator's safety
2. 智能數字調壓振動鈕扣輸送系統
Button feeding system with intelligent digital voltage-stabilizing vibration controller

- 適用於沖壓各種帽式金屬鈕扣與單針鋁鉚釘
- 智能數字調壓振動鈕扣輸送系統，適合輸送單針鋁鉚釘，鉚釘尺寸: Ø8.9~9.4mm
- 採用氣動加壓，加壓壓力可調，沖力強中帶柔，沖壓效果佳
- 沖壓到位時能原位停留至指定時間後再回位，使鈕扣沖合質量更牢固
- 十字定位燈定位，定位準確，操作簡便
- 帶特別設計的安全保護裝置，提高操作安全

選購件：

工字扣模


O-G-07-1 壓力保護裝置

- Suitable for punching all kinds of hat type metal button and single-pin aluminum rivet
- Button feeding system with intelligent digital voltage-stabilizing vibration controller, suitable for single-pin aluminum rivet, rivet size: Ø8.9~9.4mm
- Adopt air cylinder to drive, of which the pressure is adjustable. Regardless its strong power, it can handle the operation tenderly to achieve the best effect
- When stamped in place, the punching head can stay for a specified time before returning to its original position, making the button stamping quality more secure
- Cross light marker for accurate positioning and easy operation
- With specially designed safety protection device to ensure operator's safety

Optional Accessories:

Jeans Button Moulds

O-G-07-1 Pressure protective device

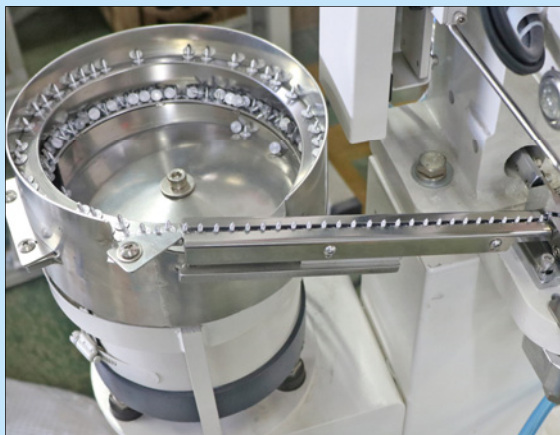

振動鈕扣輸送系統
Vibration Button Feeding System



釘工字扣操作
Jeans Button Sewing Operation



選購件Optional Accessories:



工字扣模
Jeans Button Moulds



壓力保護裝置，可在氣壓不足時停止機器沖壓動作，有效保護因沖壓壓力不夠導致的釘鈕質量問題
Pressure protective device may suspend stamping action to prevent button sewing quality issues under circumstances of pressure insufficiency

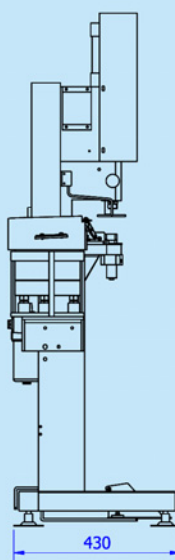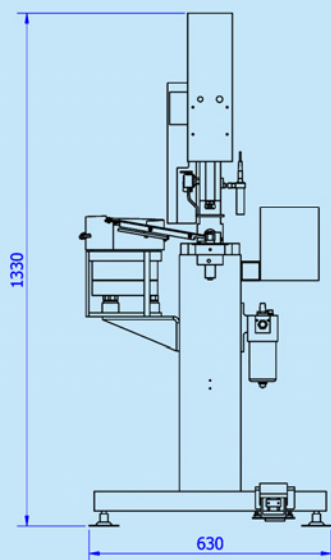

機身外形尺寸圖
Machine Outline
Dimensions Diagram

型號 Model	電源 Power Supply	總功率(kW) Total Power	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	最大沖程(mm) Max. Stroke	最大壓力 (kgf/cm ²) Max. Pressure	上模安裝孔徑 Upper Mould Installation Aperture	下模安裝孔徑 Lower Mould Installation Aperture	機身尺寸 (mm) Machine Size
NS-47C	1PH/220V/50Hz	0.2	5	70	40	390	3/8" (9.5mm)	1 1/16" (27mm)	630x430x1330



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com