

NS-6080J-A-1

自動運衣領袖口機

Automatic Collar and Cuff Runstitch Machine



2	3000RPM	DPx17 #75, #11		



- 適用於自動車縫襯衫領/袖口以及襯衫立體領/袖口
- 單片微處理器控制及人性化觸摸顯示屏，操作方便快捷
- 採用XY軸運行，可滿足不同尺寸與形狀(需配合相應模具)
- 雙工位設計，可同時鋪料和車縫
- 數碼投影裝置，鋪料對位更精準
- 獨立抽風定型，鋪料操作更方便
- 車縫不同形狀領、袖時，需更換相應模具
- 數碼調節模具尺寸，車縫同款形狀不同尺寸領、袖時，無需更換模具
- 自動收料系統，提高工作效率
- 車縫工序自動化，適合非熟練工人操作
- 裁片預先精準裁切，配合數字化車縫，無需再次切邊操作，可節省布料
- 車縫止口範圍：5~10mm

跟機件：

縫紉機(JUKI DDL-8000A-SMS)

尖角領模[客戶需提供全碼紙樣(或DXF檔)、裁片]

圓角領模[客戶需提供全碼紙樣(或DXF檔)、裁片]

選購件：

各種襯衫領模和袖口模[客戶需提供全碼紙樣(或DXF檔)、裁片]

- Suitable for automatic runstitch of ordinary and 3D shirt collar/cuff
- Adopt Single chip microprocessor and user friendly touch screen for easy and fast operation
- Adopt XY axis operation to cater for different sizes and patterns (corresponding template required)
- Twin stations designed for simultaneous operation of feeding and sewing
- Digital projection device for accurate alignment of materials
- Independent vacuum pump for setting, enables easy material feeding
- Template changing required when sewing collar or cuff of different pattern
- With digitally adjustable template sizes, template changing not required when sewing same-pattern collars or cuffs of different sizes
- Automatic collecting system boosted efficiency
- Fully automatic sewing process enables unskilled workers to operate with ease
- Precise cutting in advance for fabric pieces in coordination with digitalized sewing, eliminates the needs for further trimming, for minimal fabric wastage
- Sewing margin range: 5~10mm

Standard Accessories :


Sewing machine (JUKI DDL-8000A-SMS)

Sharp corner collar template (Customers to provide paper templates in full sizes or DXF files, fabric pieces)


Round corner collar template (Customers to provide paper templates in full sizes or DXF files, fabric pieces)

Optional Accessories :

Various collar and cuff templates (Customers to provide paper templates in full sizes or DXF files, fabric pieces)

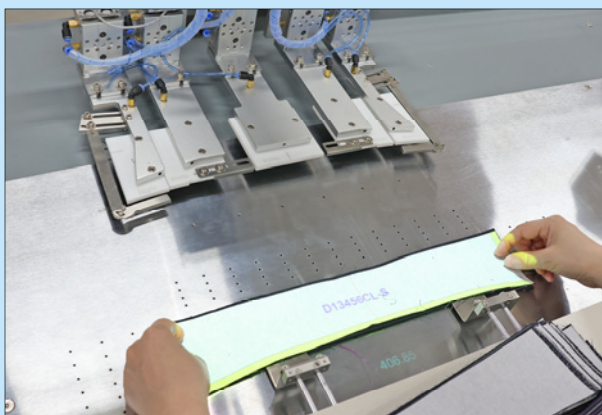

立體領操作 3D collar run-stitch operation

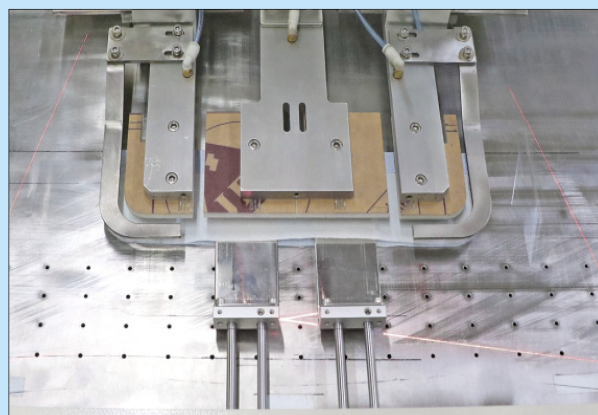

立體袖口操作 3D cuff run-stitch operation




自動收料系統 Automatic collecting system



人性化觸摸顯示屏 User friendly touch screen

選購件Optional Accessories :

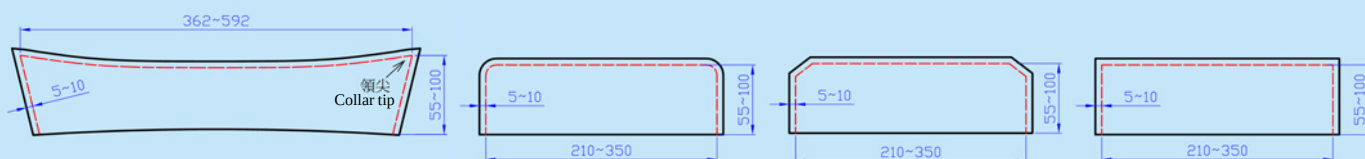

各種襯衫領模和袖口模(領尖長度車縫範圍362~592mm，領尖高度車縫範圍55~100mm；
袖口長度車縫範圍210~350mm，袖口高度車縫範圍55~100mm)

Various templates for shirt collar/cuff (collar template length 362~592mm, width 55~100mm; cuff template length 210~350mm, width 55~100mm)

型號 Model	適用衣車頭機型 Applicable Sewing Head Model	電源 Power Supply	總功率(kW) Total Power	針距長度(mm) Stitch Length	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量(L/min) Compressed Air Consumption	機身尺寸(mm) Machine Size
NS-6080J-A-1	JUKI DDL-8000A	1PH/220V/50Hz	2.7	1.4~2.5	5	32.5	2020x1250x1860



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com